

23

EN | Product Catalogue 2023 | NP

Colad

inventing more



Colad
power.



INDEX

1 MASKING	8
1.1 Masking Paper.....	9
1.2 Paper Dispenser.....	11
1.3 Masking Film.....	13
1.4 Film Dispensers	15
1.5 Foil Cutters.....	15
1.6 Miscellaneous.....	17
1.7 Masking Tape	19
2 SANDING	22
2.1 Discs.....	23
2.2 Scuffs	23
2.3 Sheets	25
2.4 Rolls.....	25
2.5 Foam.....	27
2.6 Check.....	27
2.7 Miscellaneous	29
2.8 Pneumatic Machines.....	31
2.9 Electric Machines.....	31
2.10 Pads.....	32
2.11 Vacuum Accessories.....	33
3 SURFACE PREPARATION	34
3.1 Pump Spray System.....	35
3.2 Tack Rags	36
3.3 Degreasing Wipes.....	37
3.4 Miscellaneous.....	37
4 FAST CURING SYSTEM	38
4.1 Fast Curing System.....	39
4.2 UV Curing Light.....	41
4.3 UV Putty.....	41
4.4 Complement with:.....	41
5 PAINT PREPARATION	42
5.1 Mixing Cups	43
5.2 Turbomix	45
5.3 Spray Samples	47
5.4 Paint Check.....	47
5.5 Paint Strainers.....	49
5.6 Insert Cups	49
5.7 Miscellaneous	49
6 PAINTING	50
6.1 Snap Lid® System.....	51
6.2 Accessories.....	54
6.3 Miscellaneous.....	55
6.4 Paint Protection	57

7 POLISHING	58
7.1 Polishing Compounds.....	59
7.2 Optimus.....	59
7.3 Foam Pads.....	60
7.4 Miscellaneous.....	61
8 PERSONAL PROTECTION	62
8.1 Paint Overalls.....	63
8.2 Hand Cleaners.....	65
8.3 Gloves.....	67
8.3.1 Nitrile Gloves	68
8.3.2 Preparation Gloves.....	71
8.3.3 Industrial Gloves.....	71
8.4 Masks	72
8.5 Miscellaneous.....	73
9 REPAIR	74
9.1 Undercoating.....	75
9.2 Magic Fix.....	75
9.3 Spreaders	77
9.4 Fasteners	77
10 SPRAY BOOTH	78
10.1 Maintenance Solutions	79
10.2 Dry	80
10.3 Hybrid	82
10.4 Wet	84
10.5 Miscellaneous.....	87
11 MIXING ROOM	88
11.1 Work Station.....	91
11.2 Reinforced Equipment	93
11.3 Cleaner.....	95
11.4 Paint Waste Containers.....	98
11.5 Ventilators	99
11.6 Stick & Go	99
12 WORKSHOP	100
12.1 Mobile Cabinets and Standards	101
12.2 Presses.....	102
12.3 Physical Support.....	103
12.4 Miscellaneous.....	103
13 CENTRAL DUST EXTRACTION	104
13.1 Top Quality.....	110
13.2 Pre-Separator	113
13.3 High Quality.....	115
13.4 Swing Arms	116
13.5 Energy Boxes.....	117
13.6 Extraction Points and Filters.....	119

“ Join Colad and subscribe to our newsletter!



 **WWW.COLAD.COM**
 **Colad**
 **Colad_com**

Pump Sprayer Ultimate

A superior, highly solvent-resistant pump sprayer with an adjustable spray mist and a high compression level, for a flawless spray output.



35



35

Check Light 2.0

A versatile LED work light with a CCT scan is suitable to perform colour matching and detect scratches and defects.




47

Pump Sprayer Premium

This solid pump sprayer resists both water- and solvent-based degreasers, due to the Viton O-rings.



35

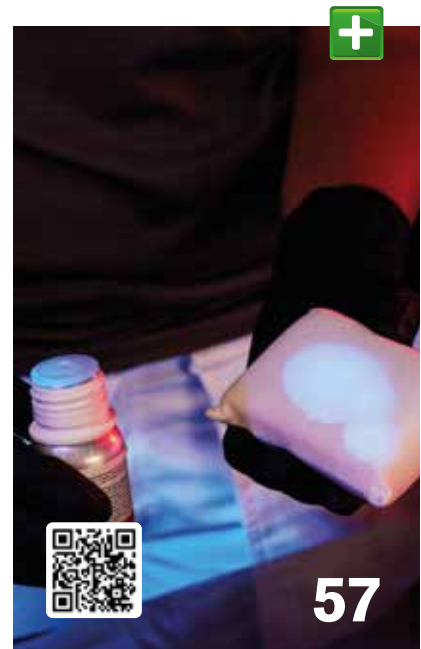

57



38

Ceramic Protection

The silicon-free, highly durable coating with 9H hardness, for a strong long-lasting protection and an easy-to-clean surface. Colad Ceramic Protection is suitable to treat any kind of metal, plastic, or painted surfaces.



Fast Curing System

The Colad Fast Curing System enables you to work faster and more efficiently while significantly reducing curing time between process steps.



Turbomix™ Paintsaver™

Perfect consistency and pigment blend are crucial for a spotless result. Mixing paint with the Turbomix™ Paintsaver™ speeds up the process, reduces paint wastage and ensures a perfect result!




Mixing cups

Colad Mixing Cups for paint preparation are made of polypropylene, because of the clearness of the cups the paint content and mixing ratios are very visible from the inside of the cup. It is designed for one way use, save cleaning time with the Colad disposable Mixing Cup.



45

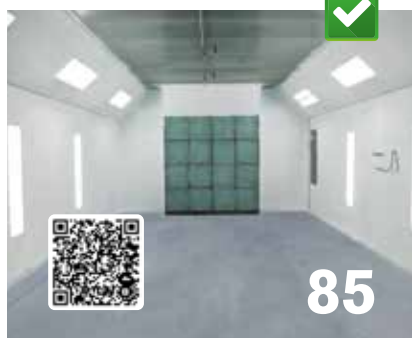

85



Antidust Premium White

A white, protective coating with tacky properties that forms a tacky layer on your spray booth walls. Antidust Premium White protects better thanks to the improved formula during low humidity conditions for instance during winter periods.



63



51

Bodyguard®

The Bodyguard® Overall provides optimum protection against overspray and prevents pollution of the paint job by fibres, dust and lint. For a full day of working comfort.



Nitrile Gloves Black

A very high quality, powder free and solvent resistant Nitrile Glove. Stronger, thicker and more durable than conventional nitrile gloves for use during the painting process.

Snap Lid®

The fastest paint application system for all types of paint. Our Colad Snap Lid System® makes your painting process fast and efficient, just Mix, Snap & Go!



Colad

power.



“ Collaboration
in pursuit of
progress...”



The world of committed innovators

As a professional painter, you are completely at the heart of Colad. Colad protects, improves and beautifies. This involves your way of working (work processes), needs regarding new topics such as sustainability, insights into ergonomics and health... This and more is successfully translated into innovative solutions. Solutions that contribute directly to the effectiveness of your work and job satisfaction. In short, everything revolves around progress. But Colad offers more. It is also a knowledge centre. It shares knowledge about (the properties of) raw materials, materials, innovations, et cetera. Inspires all stakeholders, because there is always room for improvement. Enter the world of innovators today.

**Always innovative systems
to improve the work
process**

**Health and sustainable
working comes together in
Pro Planet Proof**

**New products all the time for
even more efficiency and job
satisfaction**

**The best originals, the
most used products
among painters**



AUTOMOTIVE



MARINE



AVIATION



INDUSTRIAL



Worldwide

the number 1 among
paint refinishers.



Inspiration

for the paint professional
in our knowledge centre.



Perfect protection

with environmentally friendly masking paper.

Right absorption features.

Easy to tear in a straight line.



Colad

Masking Paper Classic

210021 (21 cm)
210028 (28 cm)
210037 (37.5 cm)
210045 (45 cm)
210060 (60 cm)
210090 (90 cm)
2100120 (120 cm)
2100150 (150 cm)

Easy tearable with the help of an aprontaper knife, but will not easy tear during handling. Perfect barrier properties in combination with the right absorption possibilities.

One 450 meters roll.



Colad

Masking Paper Premium

206021 (21 cm)
206028 (28 cm)
206037 (37.5 cm)
206045 (45 cm)
206060 (60 cm)
206090 (90 cm)
2060120 (120 cm)
2060150 (150 cm)

Easy tearable with the help of an aprontaper knife, but will not easy tear during handling. Perfect barrier properties in combination with the right absorption possibilities.

One 300 meters roll.



Colad

Masking Paper Small

206215 (15 cm)
206222 (22.5 cm)
206230 (30 cm)
206245 (45 cm)


Easy to use by hand due to the compact size of the rolls.

One 50 meters roll.

Paper Type	Classic	Premium	Small
Art. no.	2100xxx	2060xxx	2062xx
Paper	Recycled	Recycled	Recycled
Grammage	40 g/m ²	50 g/m ²	50 g/m ²
Absorption	22 g/m ²	22 g/m ²	22 g/m ²
Strength	2.2 kPa.m ² /g	2.2 kPa.m ² /g	2.2 kPa.m ² /g
Porosity	150 ml/min	120 ml/min	120 ml/min
Length	450 m	300 m	50 m
Available in	8 versions	11 versions	4 versions

PROPERTY TRIANGLE OF MASKING PAPER:

- **Grammage:** Depending on the grammage, the porosity and absorption capacities of the paper may vary.
- **Absorption:** Determines the amount of paint that can be absorbed by the paper before leaking through.
- **Strength:** The strength of the paper determines the risk of cracking while applying.
- **Porosity:** Determines the amount of paint that will leak through the paper.



ENVIRONMENTAL FRIENDLY

31% of the world is covered in woods, 7.6 billion people depend on this. Between 2000 and 2012, 229.8 million acres of these woods were destroyed. In the search of durable and environmental friendly solutions, EMM introduced recycled masking paper. Specially selected recycled paper is the base of Colad recycled masking paper. The fibers are smaller and easier to produce. This reduces the use of energy and water. Colad recycled masking paper is produced- and is biodegradable in accordance with the requirements of standard EN 13432:2000.



Apply paper at the same time as tape

for easier and faster work.

Easy to move,
even on grid floors.

1.2 PAPER DISPENSERS

inventing more



Colad

Masking Paper Dispenser

3 rolls

2010

Including 3 tape holders. Dimensions: 148 x 60 x 94 cm. Not assembled.



Colad

Masking Paper Dispenser

4 rolls

2020

Including 4 tape holders. Dimensions: 148 x 60 x 94 cm. Not assembled.



Colad

Masking Paper Dispenser

6 rolls

000847

Trolley dimensions, 150 x 40 x 135 cm. Including 6 tape holders. Not assembled.

Art. no.	No. of rolls	Max. roll width	Place
2010	3 rolls	100 cm	Mobile
2020	4 rolls	100 cm	Mobile
000847	6 rolls	120 cm	Mobile




A fitted film for every job


makes your process faster, more efficient and more economical.




Preparation Process



GREEN




Preparation Process + Paint Process




WHITE

HUMID SURFACE



Preparation Process + Paint Process



BLUE

1.3 MASKING FILM

inventing more



WHITE

Colad

Premium Masking Film

6365 (4 m x 300 m)
6365150 (4 m x 150 m)
6365200 (4 m x 200 m)
6365-48 (4.8 m x 250 m)

Translucent masking film with paint adhesion. Per roll in a carton box with dispenser functionality.



GREEN

Colad

Masking Film

6340 (3.8 m x 200 m)
6340300 (3.8 m x 300 m)

Colad Masking Film is a green translucent film without paint adhesion. With static properties that make the film stick to the surface. Per roll in a carton box with dispenser functionality.



WHITE

Colad

Heavy Duty Masking Film

6345 (4 m x 150 m)

Extra thick, white masking film with paint adhesion. Per roll in a carton box with dispenser functionality.




WHITE

Colad

Premium Masking Film Extra Wide

6660-5 (5 m x 120 m)
6660 (6 m x 100 m)

Suitable for masking sideways. Suitable for masking large vehicles like vans, SUV's and trucks. Per roll in a carton box with dispenser functionality.

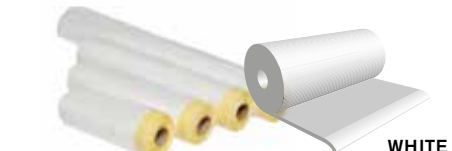

WHITE

Colad

Plastic film (with tape)

640001 (34 cm x 25 m)
640002 (60 cm x 25 m)
640003 (90 cm x 25 m)
640004 (120 cm x 25 m)
640005 (180 cm x 25 m)
640007 (260 cm x 25 m)

Masking film with paint adhesion and tape on one side. To mask various areas such as car windows, bonnets, one side of buses etc. Can be easily torn by hand (without a knife). Has static properties to ensure the film 'clings' to the surface. Per roll.



BLUE

Colad

Ultimate Masking Film

6375 (4 m x 150 m)
6375-6 (6 m x 100 m)

Translucent blue masking film with paint adhesion, 'breathing' capabilities and moist absorption. Ready to use on a humid object, prevents 'Ghost stains'. Per roll in a carton box with dispenser functionality.

	Art. no.	High static power	Paint adhesion	High tensile strength	Infrared drying max. 120°C	Extra thick 17 micron	Extra wide 5 m / 6 m	Breathing capabilities	Moist absorbing	Tape on one side
Premium Masking Film	6365 xxx	✓	✓	✓	✓	—	—	—	—	—
Masking Film	6340 6340300	✓	—	✓	—	—	—	—	—	—
Heavy Duty Masking Film	6345	✓	✓	✓	✓	✓	—	—	—	—
Premium Masking Film Extra Wide	6660-5 6660	✓	✓	✓	✓	—	✓	—	—	—
Plastic film with tape	64000x	✓	✓	—	—	—	—	—	—	✓
Ultimate Masking Film	6375 6375-6	✓	✓	✓	✓	—	✓	✓	✓	—

Improve your masking process

for clean, fast and safe paint jobs.



Always have the right film.

Highest quality standards.

Promotes safety on the shop floor.



1.4 FILM DISPENSERS

inventing more



Colad

Masking Film Dispenser Smart

2061

Easily to move around. Limit dust contamination on paint objects with the use of the closed Colad dispenser boxes. Can be stored vertical to save space. Can be used by a single operator for a smart work process. Size: 120 x 54 x 44 cm. Per piece. Not assembled.

Colad

Mobile Foil Dispenser II

2062

This Mobile Foil Dispenser is ideal for covering vehicles with plastic foil. So easy to use that one man can do the job. Simply take the dispenser to the object, stretch the foil over the vehicle and cut along the cutter guide with the foil cutter. Two rolls (4 m and 6 m) can be mounted in the dispenser saving space in the workshop. Size: 71 cm x 117,5 cm x 46 cm. Per piece. Not assembled.



1.5 FOIL CUTTERS

Colad

Magnetic Foil Cutter

2070

Very practical cutter for plastic foil and masking paper with a magnet on the back. The special design of this cutter guarantees that cutting is simple, safe and prevents damage to the vehicle. Per 10 pieces.



Colad

Electrical Foil Cutter

2075

Electrical cutter for plastic foil and masking paper, supplied in a bag with belt strap for easy storage. The special design of this cutter guarantees that cutting is simple, safe and prevents damage to the vehicle. It ensures fast and effortless cutting of the masking foil. Requires 2 x AA batteries (not included). Per piece.



2076 Spare blades for Foil Cutter. Set of 2 blades (above and below blade).



1 + 2 + 3
MASKING FILM SYSTEM



The best film to protect a car from all weather influences

after removal of doors or broken windows.





Colad

Disposable Wheel Covers

6101 (800 x 700 mm)

High quality plastic HDPE wheel covers, 20 microns. For masking of car wheels and rims during the paint process. Very easy in use and universal in application due to the Extra Large opening. 200 pieces in a box.



Colad

Re-usable Wheel Covers

6010 (58/15)
6020 (70/20)

Made of an aluminum impregnated non-woven material. Can be used and re-used between 150 and 200 times. 4 pieces in a box.



Colad

Car Interior Hygiene Kit

6102

Hygiene kit (7 pieces) for car interior protection, consists of driver seat cover, gear stick cover, handbrake cover, floor mat cover and steering wheel cover, white transparent (HDPE). Per set.



Colad

Disposable Seat Covers

6110 (820 x 1300 mm)

For protection of car seats during the complete process of preparation / sanding / painting. 100 pieces in a dispenser box.

Film4Crash

The smart film to protect a car from all weather influences after removal of doors or broken windows!

- A tough, flexible, self-adhesive plastic film to protect openings from weather influences
- Simply seal a car after collision, dismounting or vandalism
- UV resistant a maximum of 6 months. This means that you will not face any discolour of the interior of the vehicle
- After removal all adhesive comes off with the film and does not leave any residue
- Can be applied on new cured paint



Colad

Film4Crash

6870 (75 cm x 60 m)

Colad

Sensor Covers

9090 (dispenserbox: 500 pieces)

9090300 (dispenserbox: 300 pieces)

The quick and easy solution for masking integrated parking sensors! Integrated parking sensors need to be handled with care. To sand or paint a bumper perfectly they must be covered for the full 100%. Or worse, need to be disassembled. Both of these solutions are time consuming. Solve this problem by using the Colad Sensor Covers.



High-quality masking tape

with excellent adhesion.



Sharp, clean edges.

Leaves no residue.

1.7 MASKING TAPE

inventing more

Colad



Aqua Dynamic Masking Tape

900419 (48 rolls - 19 mm x 50 m)
900425 (36 rolls - 25 mm x 50 m)
900438 (24 rolls - 38 mm x 50 m)
900450 (24 rolls - 50 mm x 50 m)

Colad Aqua Dynamic Masking tape with high temperature resistance to minimize the chance of residue. This tape is especially designed for the professional user and perfectly suitable where waterborne (or 2K) systems are used.

- For water-based paint systems
- Up to 130 degrees temperature resistance for 1 hour!
- Sharp and clean edge for precise sticking and easy application
- Excellent adhesion both to rubber and metal
- Tape can be removed easily and without residue

Colad



Colad Orange™ Masking Tape

900019 (48 rolls - 19 mm x 50 m)
900025 (36 rolls - 25 mm x 50 m)
900038 (24 rolls - 38 mm x 50 m)
900050 (24 rolls - 50 mm x 50 m)

Colad Orange™ Masking Tape is an orange colored masking tape that is waterproof, high temperature and UV resistant. It also has a unique adhesive compound. It is suitable for all types of paint systems.

- This tape is UV and weather resistant up to 14 days
- It leaves no residue after removal, has exceptional sharp lines and has a temperature resistance of 100°C for 1 hour
- Now with improved tack and UV resistance!

Colad



Premium Masking Tape

907019 (48 rolls - 19 mm x 50 m)
907025 (36 rolls - 25 mm x 50 m)
907030 (40 rolls - 30 mm x 50 m)
907038 (24 rolls - 38 mm x 50 m)
907050 (24 rolls - 50 mm x 50 m)

Masking tape with high temperature resistance to optimize the application of the product. Can be used for a variety of purposes and leaves no residue. Sharp clean edge for perfect application.

Colad



Ultimate Masking Tape

902019 (48 rolls - 19 mm x 50 m)
902025 (36 rolls - 25 mm x 50 m)
902038 (24 rolls - 38 mm x 50 m)
902050 (24 rolls - 50 mm x 50 m)

Masking tape with even higher temperature resistance than the Colad Premium Masking tapes. Leaves no residue. Up to 110°C for a maximum of 1 hour!

	Art. no.	High temperature	High tack	Weather resistant	No residue	UV resistant	Sharp edges
Colad Orange™ Masking Tape	9000xx	✓ 100°C 1 hour	✓✓	✓	✓✓	✓✓	✓✓
Aqua Dynamic Masking Tape	9004xx	✓ 130°C 1 hour	✓✓	—	✓✓	—	✓
Ultimate Masking Tape	9020xx	✓ 110°C 1 hour	✓✓	—	✓✓	—	✓
Premium Masking Tape	9070xx	✓ 80°C 1 hour	✓	—	✓	—	✓



Innovative diagonally shaped Foam Tape

for the smoothest edges.

Create flawless paint transitions in hard to reach places



Colad

Diagonal Foam Masking Tape

9080 (38 m)

Innovative diagonally shaped Foam Tape for the smoothest edges. Seal apertures between panels preventing the need for rework on hard paint lines by using our innovative diagonally shaped Foam Tape. Per roll, 38 m. in a dispenser box.



Colad

Foam Masking Tape

908013 (13 mm x 50 m)

908019 (19 mm x 35 m)

Foam Masking Tape is the product to use for masking gaps between bonnets, doors and car body parts. Per roll in a dispenser box.



Colad

Seam Sealing Tape

906709 (9 mm)

906712 (12 mm)

A time saver for applying sealing seams for paint projects on car, truck and camper doors and angles. Colad Seam Sealing Tape is a reinforced acrylic tape with high tack and shear strength performance acrylic adhesive. Excellent resistance to solvent, chemical, UV and heat, making the tape bond securely to a very wide range of substrates. 9 m per roll.



Colad

Fine Line Tape

903003 (3 mm x 55 m)

903006 (6 mm x 55 m)

903009 (9 mm x 55 m)

903012 (12 mm x 55 m)

903019 (19 mm x 55 m)

Green Fine Line Tape, specially designed to mask objects if excellent colour separation is required when spraying with multiple colours, printing or custom painting. It adheres to a wide variety of surfaces and can be used in combination with waterborne coatings. It can be removed easily without leaving any residue. 1 roll in a plastic bag.



Colad

Stegoband Classic

906013 (9 mm x 10 m)

Masking tape designed specifically for masking jobs in hard-to-reach places, ensuring you to cover glued or rubber-mounted windcreens or gaps between car body parts. To make masking jobs easier, the adhesive is protected by a paper liner. Stegoband can be removed easily leaving no residue. Per roll in a dispenser box.



Colad

Stegoband Perforated

906023 (10/11 mm x 10 m)

This Stegoband is perforated every 4 cm so it is easy to tear off. It has a wide edge of 21 mm in total. It is also possible only to use the small edges of 10 or 11 mm. Stegoband can be removed easily leaving no residue. Per roll in a dispenser box.



Sanding products for professionals

solutions for the smoothest
finish.



2.1 DISCS

inventing more



For machine sanding during all stages of the repair process. Open-coated aluminium oxide abrasives especially prepared for strength and durability. Hook & Loop, to be used with 150 mm pads. 100 discs per box (*50 discs per box).

	Holes	Hook & loop	Art. no.			
Sanding Discs Premium 	8 + 6 + 1	150 mm	36800040 (P40)*	(50 discs per box)	36800060 (P60)*	(50 discs per box)
			3680008010 (P80)	(100 discs per box)	3680032010 (P320)	(100 discs per box)
			3680010010 (P100)	(100 discs per box)	3680036010 (P360)	(100 discs per box)
			3680012010 (P120)	(100 discs per box)	3680040010 (P400)	(100 discs per box)
			3680015010 (P150)	(100 discs per box)	3680050010 (P500)	(100 discs per box)
			3680018010 (P180)	(100 discs per box)	3680060010 (P600)	(100 discs per box)
			3680022010 (P220)	(100 discs per box)	3680080010 (P800)	(100 discs per box)
			3680024010 (P240)	(100 discs per box)		
Sanding Discs Premium 	6 + 1	150 mm	3650004010 (P40)*	(50 discs per box)	3650006010 (P60)*	(50 discs per box)
			3650008010 (P80)	(100 discs per box)	3650036010 (P360)	(100 discs per box)
			3650012010 (P120)	(100 discs per box)	3650040010 (P400)	(100 discs per box)
			3650015010 (P150)	(100 discs per box)	3650050010 (P500)	(100 discs per box)
			3650018010 (P180)	(100 discs per box)	3650080010 (P800)	(100 discs per box)
			3650024010 (P240)	(100 discs per box)		

2.2 SCUFFS

Non-woven material can be used for both wet and dry hand scuffing as well as with a sanding machine. Type A Very Fine (Red) is particularly appropriate for the roughening of unpainted plastics, plywood and aluminium. Type S Ultra Fine (Grey) is particularly effective for the roughening between coats when using 2-component paints and primers. The material is flexible and follows the shape of the working surface.



Scuff Pads 150 mm x 230 mm

38000800 (Red Type A Very Fine)
38001500 (Grey Type S Ultra Fine)
20 pads in a box



Scuff Discs Ø 150 mm

38500800 (Red Type A Very Fine)
38501500 (Grey Type S Ultra Fine)
10 discs shrink wrapped



Scuff Rolls 115 mm x 10 m

38200800 (Red Type A Very Fine)
38201500 (Grey Type S Ultra Fine)
1 roll shrink wrapped



An extensive range

of various sanding sheets for an efficient and high-quality sanding job.



Mobile dust extractors
for top performances.

2.3 SHEETS

inventing more



Colad

Waterproof Sheets 230 x 280 mm

35000600 (P600)
35000800 (P800)
35001000 (P1000)
35001200 (P1200)
35001500 (P1500)
35002000 (P2000)
35003000 (P3000)

For wet hand sanding of all paints. Specially prepared latex waterproof paper for surface treatment of small paint defects. A set of 50 sheets per sleeve.



hamach

Delta Sanding Sheet (7 Holes) Hook & Loop

858060 (P60)
858080 (P80)
858100 (P100)
858120 (P120)
858150 (P150)
858180 (P180)
858220 (P220)
858240 (P240)
858280 (P280)
858320 (P320)
858360 (P360)

Sanding sheets to use for dry sanding with Hamach Delta sanding tools. Box of 50 sheets.

2.4 ROLLS



hamach

Sanding Rolls 95 mm x 23 m

119040 (P40)
119080 (P80)
119100 (P100)
119120 (P120)
119150 (P150)
119180 (P180)
119220 (P220)

Sanding paper for dry hand sanding or sanding machine.



hamach

Sanding Rolls 115 mm x 23 m

120040 (P40)
120060 (P60)
120080 (P80)
120100 (P100)
120120 (P120)
120150 (P150)
120180 (P180)
120220 (P220)

Sanding paper for dry hand sanding or sanding machine.



Control solutions for a perfect finish

and a reduced sanding time with an optimum end result.



Discover imperfections quick and easily.



2.5 FOAM

inventing more

Colad

Soft Flex Rolls 115 mm x 25 m

38950180 (P180)
38950240 (P240)
38950320 (P320)
38950400 (P400)
38950500 (P500)
38950600 (P600)
38950800 (P800)
38951000 (P1000)

Sanding paper on foam backing. Specially for sanding intricate parts. Can be used wet or dry. Roll of 25 m long with perforated pieces. Size of the perforated pieces 125 x 115 mm. In a dispenser box.



Colad

Double Sided Foam Sanding Pads

37700060
Grit 60 - Medium (120-180)
37700100
Grit 100 - Fine (240-320)
37700180
Grit 180 - Super Fine (500-600)
37700220
Grit 220 - Ultra Fine (800-1000)
37700280
Grit 280 - Micro Fine (1200-1500)

These highly flexible double sided sanding pads for hand sanding can be used for wet or dry sanding to sand parts that machines cannot reach. Adaptable to contours, curves and profiles. Long-lasting product. 120 x 98 x 13 mm. Box of 10 pads.



2.6 CHECK

Colad

Easy2Check®

9300 (400 ml spray)

The most efficient and effective product to check for any irregularities while sanding panels. The 'glossy finish' helps detecting any defects or colour deviations. Spray the panel after the sanding process to check repaired surfaces on irregularities. Can also be used for spray sample checks! 400 ml per spray.



Colad

Control Powder

8035 (100 g)

Sanding guide to be used as a sanding control coat on fillers. This product is very economical in use and can be widely applied. Per box of 100 g and applicator in each box.



All sanding accessories

for efficient work and
high-quality results.



Colad

Surface Protection Tape

905050 (50 mm x 50 m)

For protection during sanding, grinding and light blasting jobs. Perfectly suited for the temporary wedging of glued windscreens. 1 roll in a plastic bag.



Colad

Rubber Eraser Pad

021290

Specially designed to remove pinstripes, stickers & decals, car lettering, glue residue, attachment tape and foil from paint and chrome surfaces. The pad can withstand up to 4000 RPM and with included adapter it's suitable for use in any drilling machine.

2 pieces in a box, adapter included.



Colad

Viscose Sponges

9150

Viscose Sponges for washing or adding water during any sanding process. Dimensions 135 x 90 x 34 mm. 10 pieces in a plastic bag.



Colad

Prepping Paste

3800 (600 ml)

Prepping paste is used to simultaneously degrease, clean and sand the surface before painting. Recommended for application with Colad Scuff Pad S Ultra Fine Grey (Art. No. 38001500). This water based product is absolutely silicone free and does not harm the environment. 600 ml in a bottle.



Colad

Body Line Marking Tool

8040

The Colad Body Line Marking Tool is designed for body shops. This unique marking tool helps you to follow and mark the original body lines of a vehicle in a fluid motion. A pencil will mark the outer body lines of vehicle design, even on difficult round and curved auto parts, like wheel housing, doors, etc. This can be used to follow the line and improve and speed up the sanding process. Per piece, including pencil.



hamach

Hand Sanding Mouse HM 150

010094

Hand Sanding Mouse - 150 mm. Lightweight construction made of tough plastic. Developed for Ø 150 mm Sanding Discs, Hook & Loop. Per piece.



Electrical and pneumatic machines

hamach
DUTCH ENGINEERING



THINKING
OUT OF
THE BOX

THE HD SERIES

hamach

HD 983 and HD 98 One-Hand Orbital Sander

000215 HD 983 2.4 mm - 150 mm pad

000214 HD 98 5 mm - 150 mm pad

Designed for sanding fine grits, paint, wood, mastic and primers. With vacuum connection for dust extraction. Warranty 12 months.

3680 Standard: Evo MaxFlow Sanding Support Pad Ø 150 mm
3683 Option: Interface pad soft Evo - MaxFlow Ø 150 mm



hamach

Sander DS 40 Random Orbital Micro 3.0 - 30 mm pad

000223

Pneumatic mini random orbital sander for efficient elimination of paint defects. Fast sanding.

022301 Standard: Mini pad (Hook & Loop) Ø 30 mm
022302 Option: Mini pad (Adhesive) Ø 30 mm



hamach

DS 70 Rotating Polishing Machine 70 mm pad

000224

Compact Ø 70 mm pneumatic rotating polishing machine for efficient polishing of paint defects. Supplied in a carrying case with:

022401 Standard: Support pad (Hook & Loop) Ø 70 mm
010057 Standard: Foam pad Ø 76 mm

2.9 ELECTRIC MACHINES



hamach

VH 77 V Orbital Sander 5 mm - 350 W Adhesive backing plate

000014Y

Perfectly suited for multiple flat sanding tasks. Supplied with a dust extraction connection.

001403 Standard: Adhesive rubber backing plate
115 x 208 mm with holes
001438 Option: Backing plate 115 x 208 mm with holes
(Hook & Loop)



hamach

VH 77 V Orbital Sander 5 mm - 350 W Hook & Loop backing plate

000014X

Perfectly suited for multiple flat sanding tasks. Supplied with a dust extraction connection.

001438 Standard: Backing plate 115 x 208 mm with holes
(Hook & Loop)
001403 Option: Adhesive rubber backing plate
115 x 208 mm with holes

200 mm



hamach

Sanding Support Pad Hard
010027

(8 holes / 6 screws) Hook & Loop
200 mm. Per piece.



hamach

Sanding Support Pad Hard
010014

(8 holes / 8 screws) Hook & Loop
200 mm. Per piece.

150 mm



Colad

Evo MaxFlow Sanding Support Pad
3680

(96 holes) 5/16" thread
150 mm. Per piece.




Colad

Interface pad soft Evo - MaxFlow
3683

(96 holes) Hook & Loop
150 mm. 3 pieces per box.

150 mm



hamach

Sanding Support Pad Medium
010033

(6+1 holes) Hook & Loop
150 mm. 5/16" thread. Per piece.



hamach

Sanding Support Pad Hard
010018

(6+1 holes) Hook & Loop
150 mm. 5/16" thread. Per piece.

76 mm



hamach

Sanding Support Pad Hard
010056

(3 holes) Hook & Loop
76 mm. 5/16" thread. Per piece.



hamach

Vacuum Hose with Air Hose and Couplings Ø 29 mm

009968 (4 m)
009969 (8 m)



hamach

Vacuum Hose Ø 29 mm

009965 (4 m)
009966 (8 m)
009967 (15 m)



hamach

Vacuum Hose with Air Hose (no couplings) Ø 29 mm

009962 (4 m)
009956 (6 m)
009963 (8 m)
009975 (10 m)
009977 (15 m)



hamach

Vacuum Hose Ø 29 mm Anti Static

009958 (4 m)
009959 (8 m)

Conductive $< 10^6 \Omega$
(according to DIN EN ISO 8031)



hamach

Vacuum Hose Anti Static with Air Hose (no couplings) Ø 29 mm

009958-1 (4 m)
009959-1 (8 m)

Conductive $< 10^6 \Omega$
(according to DIN EN ISO 8031)

All vacuum hoses are supplied per piece.

hamach
DUTCH ENGINEERING



Hose connector for combi hose

004995
Per piece.



Adapter for hose connection vacuum cleaner, 31 mm

004994
Per piece.



Adapter for hose connection sander, 29 mm

004993
Per piece.



Double hose connector for HMV 6-L EA/EA-PA

077682
Per piece.



Fleece Dust Bag HMV 6-L

076802
5 pieces.

The unique coding system

to distinguish different liquids quick and easy.

Colad PUMP
SPRAY SYSTEM
SWISS MADE



Extremely solvent
resistant seals



High pressure



Inclinable nozzle with
adjustable spray output



Unique color coding
system



**Pump Sprayer
Ultimate**

1 L / 33.8 Fl Oz



**Pump Sprayer
Coding Rings**

5 pcs



**Color
Identification Chart**

1 pcs

**A COMPLETE SET
FOR OPTIMUM
ORGANIZATION**

Art.no. 9704

3.1 PUMP SPRAY SYSTEM

inventing more



Colad

Pump Sprayer Ultimate

9704

A superior, highly solvent-resistant pump sprayer with an adjustable spray mist and a high compression level, for a flawless spray output. This solid pump sprayer is highly resistant to nearly all water- and solvent-based degreasers, due to the specially designed seals. The continuous high pressure (3.0 bar) guarantees a flawless spray output which can be adjusted to your needs with the adjustable and durable, brass spray nozzle. The fluid level is readable from the outside, and the bottle can be stably placed on any flat surface, due to its flat base. The Colad Pump Spray System allows you to easily identify between different fluids, using colour-coded rings. Log your code on the Colour Identification Chart to maintain control of your sorting. Content: 1000 ml. Including: One Pump Sprayer + Six Pump Spray Coding Rings + One Colour Identification Chart



Colad

Pump Sprayer Premium

9703

This solid pump sprayer resists both water- and solvent-based degreasers, due to the Viton O-rings. The continuous high pressure (3.0 bar) guarantees a flawless spray output which can be adjusted to your needs with the adjustable and durable, brass spray nozzle. Content: 1000 ml. Including: One Coding Ring. Per piece



Colad

Pump Sprayer Coding Rings

9702

A unique system to easily distinguish the content of your pump sprayers. The Colad Pump Sprayer Coding Rings allow you to easily identify between different fluids, using colour coding. Log your code on the Colour Identification Chart to maintain control of your sorting. 5 pcs.



Colad

Colour Identification Chart

970201

Log your code on the Colour Identification Chart to maintain control of your sorting. Size: A2 (420 x 594 mm). Per piece, folded in four to A5 (210 x 148 mm).




Colad

Nickel-Plated Nozzle Pump Sprayer Ultimate

970402

One spare part nickel-plated nozzle for the Colad Pump Sprayer Ultimate. 4 grams. Per piece.



Colad

Sealing-Set Pump Sprayer

970401 Ultimate

970301 Premium

Seven-piece spare part set, with seals for the Colad Pump Sprayer. Kit with the most common sealing rings and parts for the Colad Pump Sprayer. Per set.

Colad

Universal Bracket

937020

This Universal Bracket is a multi-purpose product. The bracket's hooks are designed to perfectly fit into the dispenser boxes and the handle of the Pump Sprayer Ultimate and Premium. Per piece.



A perfect paint project

starts with a spotless surface.



3.2 TACK RAGS

	 Colad	 Colad	 Colad	 Colad
	Tack Rags Gauze	Non-woven Tack Cloth	Tack Rags Waffled	Tack Cloth Waterbased
Art. no.	9165	9180	9175	000805
Recommended for	Medium to large dust particles	Small to medium dust particles	Large dust particles	Small, medium and large dust particles
Material	Cotton Gauze	Viscose and Polyester	Cotton Gauze	Viscose and Polyester
Size	82 x 45 cm	32.5 x 45 cm	81 x 92 cm	61 x 37 cm
Structure	Open	Compact	Open: waffled format	Combined compact and open
Package	Per box of 10 pieces in individual bags	Per box of 10 pieces in individual bags	In a bag	Set of 10 pieces in a plastic bag
Properties	<ul style="list-style-type: none"> ▪ For use with water and/or solvent based coatings ▪ Naturally treated (no chemical treatment or bleaching) ▪ Anti-static ▪ Lint free 	<ul style="list-style-type: none"> ▪ For use with water and/or solvent based coatings ▪ Natural binders (no solvents) so solvent compatible ▪ Lint free 	<ul style="list-style-type: none"> ▪ For use with water and/or solvent based coatings ▪ Naturally treated (no chemical treatment or bleaching) ▪ Lint free 	<ul style="list-style-type: none"> ▪ For use with water and/or solvent based coating ▪ Can be applied as transition edge remover ▪ Removes imperfections on various substrates before spraying ▪ Lint free

3.3 DEGREASING WIPES

inventing more



Colad

Degreasing Wipes Turquoise 8850

To create an excellent paint job, you need to work on a spotless, degreased surface. This preparation process requires perfect cleaning to avoid any contamination of the painted surface. These Turquoise Degreasing Wipes are easy to use in combination with degreasers. These strong wipes are enormously absorbent for fast absorption of degreasers. The wipes are packaged in a convenient dispenser box. 200 pieces in a box. Dimensions: 42 x 30 cm per wipe.

937020 Option: Universal Bracket



Colad

Degreasing Wipes Turquoise on a roll 8870

These Turquoise Degreasing Wipes are easy to use in combination with degreasers. These strong wipes are enormously absorbent for fast absorption of degreasers. The wipes leave no residue on the cleaned surface and ensure a spotless, degreased surface and protection of your paint jobs. They are suitable for all cleaning processes. 500 pieces on a roll. Dimensions: 38 cm x 32 cm per wipe.



Colad

Cleaning and Degreasing Wipes 9120

The preparation process is a very important step in the creation of an excellent paint job. You need perfect cleaning to create a spotless and degreased surface to work on, so that you will avoid any contamination of the painted surface. These cleaning and degreasing cloths will degrease and clean the surface at the same time! The wipes are made of 100% polypropylene and leave no residue on the surface which protects the paint job. 500 pcs on a roll, 32 cm x 38 cm per cloth.

3.4 MISCELLANEOUS



Colad

WaterlessWash 8000 (5 L can)

Colad WaterlessWash increases your productivity by enabling you to clean car panels and/or surfaces directly in the bodyshop! 5 L can.



Colad

Glass Scraper 9190

Scraper specially designed for the body shops, to remove the overspray on car windows if they have been sprayed accidentally. Will not cause scratches. With 5 spare blades. Per piece.

9200 Option: A box with 20 pieces spare blades



Spot on

the fastest and most powerfull
UV curing solution.



4.1 FAST CURING SYSTEM

inventing more

Accelerate your curing time



The process of UV curing (Ultraviolet Curing) is a photochemical process during which the operator uses ultraviolet light from a specially designed tool to instantly dry UV curing products (such as coatings, primers and adhesives).

The Colad Fast Curing System enables you to work faster and more efficiently while significantly reducing curing time between process steps. UV products can be dried fast and easily with the Colad Fast Curing System UV Curing Light. Curing times depend on layer thickness and exposure distance. UV light is able to cure layers with a thickness of up to 1 mm.



UV Curing Light



UV Putty Fine



UV Putty Coarse



UV Putty Transparent

Damage

Sand

Degrease

Apply UV Putty (Coarse)

UV Curing

Apply UV Putty (Fine)


UV Curing

Apply Control Powder

Sand

Clean

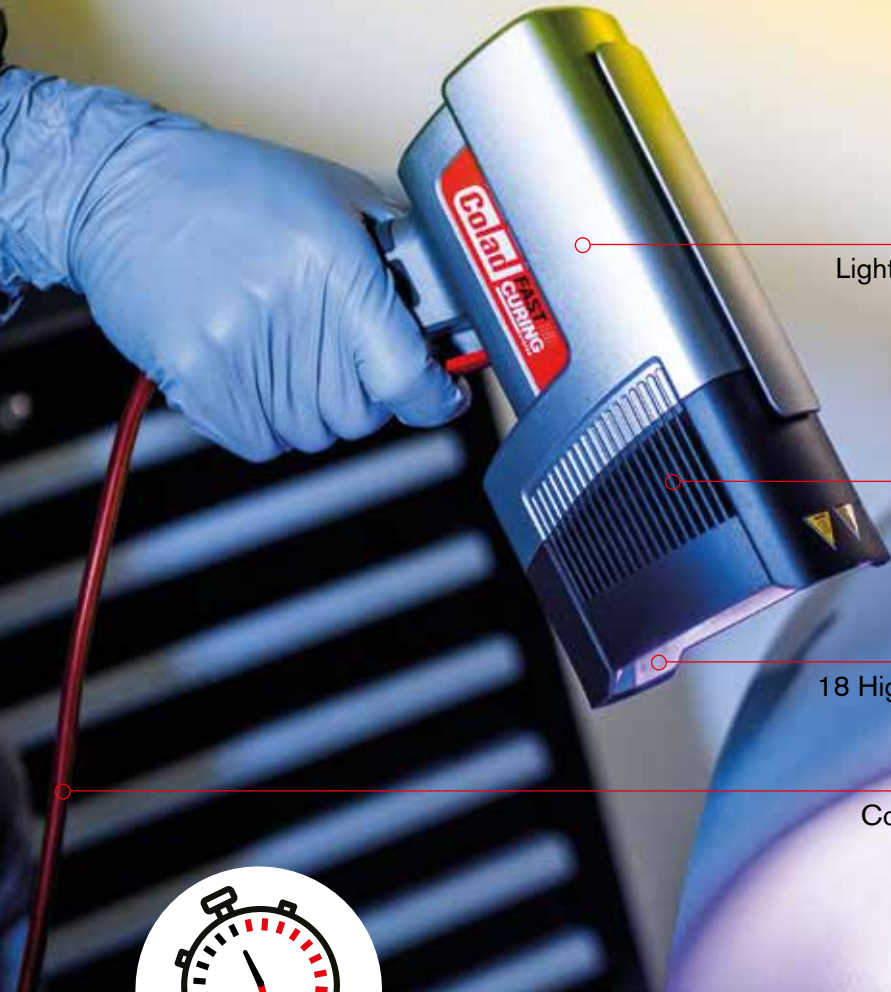

Lightweight design and
easy to operate

Smart cooling

18 High intensity UV LEDs and
constant UV intensity

Cord wired, so always
at your service



Easy dosing from the tube

Designed to fill microholes,
cracks, dents and stone chips

Ready to use,
no need to add a hardener

Styrene free

Possible to apply multiple
thin layers right after each other

**Extremely fast
drying UV Putty**

4.2 UV CURING LIGHT

inventing more



Colad

UV Curing Light 9000

The Colad Fast Curing System enables you to work faster and more efficiently while significantly reducing curing time between process steps. UV products can be dried fast and easily with the Colad Fast Curing System UV Curing Light, curing times depend on layer thickness and exposure distance. UV light is able to cure layers with a thickness of up to 1 mm. Per piece in a storage case. Content: UV Curing Light, UV Safety Goggles, UV Putty Fine, Polyester Preparation Gloves, manual and warranty card.



4.3 UV PUTTY

Colad

UV Putty Coarse 915020 (190 g)

An all-round UV putty, perfect for smart and spot repair. The putty is a one-component product, making it easy to apply. Can be applied to various surfaces, like metal and plastics.



Colad

UV Putty Fine 915011 (220 g)

An all-round UV putty for finishing small unevenness. Perfect for smart and spot repair. The putty is a one-component product, making it easy to apply. Can be applied to various surfaces, like metal and plastics.



Colad

UV Putty Transparent 915033 (50 ml)

The Colad Fast Curing System UV Putty Transparent is a UV putty specially developed to fill tiny rock chips. Perfect for smart and spot repairs. The putty is a single-component product and is easy to apply to various substrates, like metal and plastics. Apply the putty with the Colad Paint Touch-Up Sticks included to fill even the smallest chips. Easy to dry with the Colad Fast Curing System UV Curing Light, with a maximum curing time of 5 seconds. 3 bottles + 100 Touch-Up Sticks per box.



4.4 COMPLEMENT WITH:



Colad

Nitrile Gloves Grey Art. no. 53820x

UV Safety Goggles Art. no. 5087



Colad

Snap Lid System® UV Art. no. 9370xxSLSUV

Snap Lid System® 88 ml SMART repair Art. no. 931001x0SLS



Colad

Pump Sprayer Ultimate Art. no. 9704

Degreasing Wipes Turquoise Art. no. 8850



Colad

Control Powder Art. no. 8035

Plastic Spreaders Art. no. 910x

Prevent paint contamination

for the best possible results.



5.1 MIXING CUPS

inventing more

Colad Mixing Cups for paint preparation are made of polypropylene, because of the clearness of the cups the paint content and the mixing ratios are very visible from the inside of the cup.

It is designed for one way use, save cleaning time with the Colad disposable Mixing Cup.

THE PERFECT MIX!

AVAILABLE IN
SIX SIZES

COMPATIBLE WITH VARIOUS
PAINT APPLICATION SYSTEMS

SOLVENT RESISTANT

FLEXIBLE



STACKABLE TO SAVE SPACE

PRECISION PRINTED WITH
11 ACCURATE MIXING
RATIOS:

1:1, 2:1, 3:1, 4:1, 5:1, 6:1, 7:1, 8:1, 9:1,
10:1, 11:1.

*350 ml has 8 mixing ratios.

2 MEASUREING SCALES

In millilitres and fluid ounces.

FLAT BOTTOM

Mixing Cups



Quantity	120 pieces (4 x 30 pieces)	150 pieces (6 x 25 pieces)	300 pieces (6 x 50 pieces)	40 pieces (2 x 20 pieces)
350 ml	-	9350150	9350300	-
700 ml	-	9370150	9370300	-
900 ml	-	9390150	-	-
1400 ml	9400120	-	9400300	-
2300 ml	9410120	-	9410300	-
6000 ml	-	-	-	9426



Colad

Mixing Cup 6 L

9425

9426 - printed

6 L mixing cups. 40 pieces in a box.



Colad

Mixing Cup Dispenser

94990350 (350 ml)

94990700 (700 & 900 ml)

94991400 (1400 ml)

94992300 (2300 ml)

Wall dispenser made of durable stainless steel to hold Colad Mixing Cups. The Mixing Cups are easily dispensed one at a time, keeping them clean and free from dust and saving space in the mixing room. Per piece.

Colad

Mixing Cup Lids

9320 (88 ml)

9360 (350 ml)

9380 (700 & 900 ml)

9480 (1400 ml)

9490 (2300 ml)

9425LID (6000 ml)

To cover the Colad Mixing Cups and to protect paint against dirt and dust. Easy application. 40 pieces in a box: 9425LID, 100 pieces in a box: all others.

Perfect composition

and optimal mixing.



Colad **TURBOMIX®**
PAINTSAVER



Break it before you mix it to save paint and pigments.

5.2 TURBOMIX

inventing more



Ergonomic handle

Mix better and
save save more
(up to 5-7 grams per use)

Uniquely shaped holes

Integrated '**break it
and save it**' system

Colad




Colad


Turbomix™ Paintsaver™ 9500

Perfect consistency and pigment blend are crucial for a spotless end result. Mixing paint with the Turbomix™ Paintsaver™ speeds up the process, reduces paint wastage and ensures a perfect result! Dimensions: 22 x 2 cm. Suitable for mixing cups up to 1400 ml. 512 pieces in a dispenser box.


937020 Option: Universal Bracket



Break



Mix



Save



Colad

Turbomix Paddles XL 9520200

Plastic paddle made from recycled synthetic material. Easier stirring and better mixing due to the curved shape and holes. Dimensions: 30 x 3 cm, suitable for mixing cups of 1400 ml, 2300 ml or 6000 ml. 200 pieces in a dispenser box.



Supporting products

for adequate colour recognition during paint preparation.



5.3 SPRAY SAMPLES

inventing more



Colad

Metal Spray Samples

9315 (white)
9315-01 (light grey)
9315-02 (medium grey)
9315-03 (dark grey)
Set of 750 pieces.

Colad

Metal Spray Samples with Magnetic Holder

9319 (white)
9319-01 (light grey)
9319-02 (medium grey)
9319-03 (dark grey)
Set of 250 pieces.

9319-04 (all colours, 50 pieces per colour. Set of 200 pcs.)



Colad

Magnetic Holder

931901
To keep your hands clean while spraying.



Colad

Spray Samples with Hole

9310

Paper spray sample cards provided with black and white stripes. A small hole in the card speeds up exact colour matching. Suitable for conventional and waterborne coatings. 250 pieces in a box with one holder.



Colad

Spray Sample Cabinet

Metal spray samples (white) equipped with solid cabinet: an ideal system for keeping your Metal Spray Samples neatly stored!

931801 Empty
9318 (931801 + 250 White Metal Spray Samples)

5.4 PAINT CHECK



Colad

Easy2Check®

9300 (400 ml)

Spray on a spray sample to create a glossy finish and check if the colour corresponds. Can also be used for sanding checks! 400 ml spray.



Colad

Check Light 2.0

9332

Versatile work light with CCT SCAN. Using a hand-held working light has never been easier. The Colad Check Light 2.0 guarantees a clear and natural view of any job, wherever you are. The light has stepless dimming light power. Including light diffuser, designed to diffuse and smooth the light. Warranty 24 months. Including charger/holder. One piece in a carton.

The fastest screening solution

with the highest quality.



5.5 PAINT STRAINERS

inventing more



Colad

Nylon Strainers 125 micron

1043 1000 pieces in box

Paper strainers for waterbased paints, with 125 micron nylon mesh for fast and perfect filtering, delivered either in plastic bag or in dispenser to keep them perfectly clean.



Colad

Nylon Strainers 190 micron

1045 1000 pieces in box

Strainers for conventional paints made in paper with 190 micron nylon mesh, delivered either in plastic bag or in dispenser to keep them perfectly clean.



5.6 INSERT CUPS



Colad

Metal Paint Buckets

9440 Box of 100 cups (2300 ml) + 4 Colad Metal Paint Buckets
9450 Box of 36 Metal Paint Buckets

Plastic mixing cups holding 2300 ml for quick exchange of paint types or colours for the house painter.



Colad

Insert Cup 2.5 L

9435

Always a clean Insert Cup for quick and easy change of paint colour or paint type. Equipped with extra wide, smooth edge to remove access paint from paint brush. Content 2500 ml. 120 pieces per box.

5.7 MISCELLANEOUS

Colad

Dispenser Bottle 1000 ml

9700

1000 ml plastic bottle for dispensing special diluent to waterborne coatings. Equipped with a fine, "drop by drop" nozzle. Per bottle.



Colad

Touch Up Bottle Set

9186

Provide your client with a paint specimen so that they can touch up minor damage themselves. 100 touch up bottles 30 ml, 100 lids with built-in brush, 200 metal mixing balls to obtain thorough mixture, self adhesive labels for indicating content and a funnel.





**You're serious
about painting**

we get that.



Simple.
Mix
Snap
Go!





Simple. Mix, Snap, Go!

Lay it on thick

Or thin. Use any type of paint.

4 different types of filters.



90 micron
**Clear
Coat**



130 micron
**Waterborne
Base Coat**



190 micron
**Conventional
Base Coat**



280 micron
Primer

Connect any spray gun

let's find your adapter.

Use the adapter tool on: snaplid.com.



Large cup
900 ml

Up for a big
challenge.



Standard cup
700 ml / 700 ml UV

Perfect for your
regular gig.



Medium cup
350 ml

Excellent for
smaller jobs.



Small cup
88 ml

Great for
spot repair.

**Size
does
matter!**

Save time and money using the Snap Lid System®


don't waste a thing and use every last drop.



Suitable for small and big jobs.

Fits any spray gun.

For all types of paint.

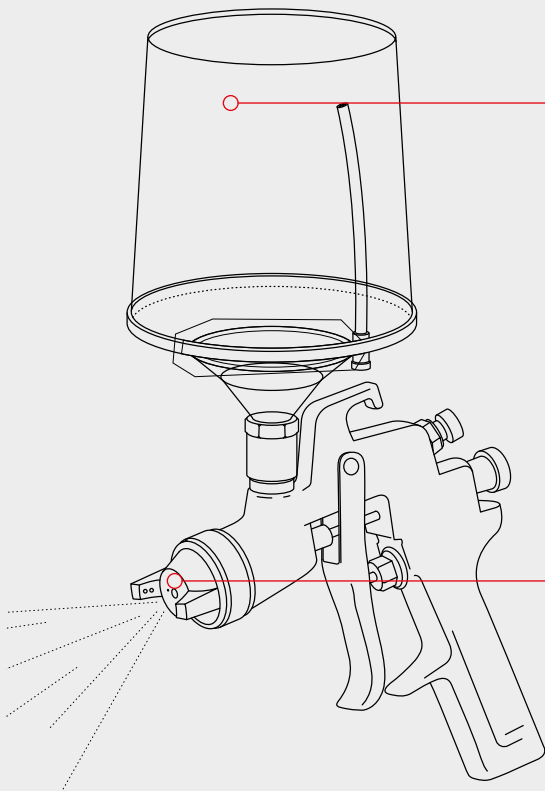

Save material


save one cup, every job.

You use one cup for mixing and painting. Unlike other systems that require various steps that slow down the paint process, Colad Snap Lid System[®] is quick to use. Snap the lid on the mixing cup and go. The math is easy: save material by using one less cup, every job.

Save paint

use every last drop.


Make optimal use of your time. Our unique vented system gives you the ability to work neater and with a stable, consistent paint flow. Less paint is wasted, use less to create more!

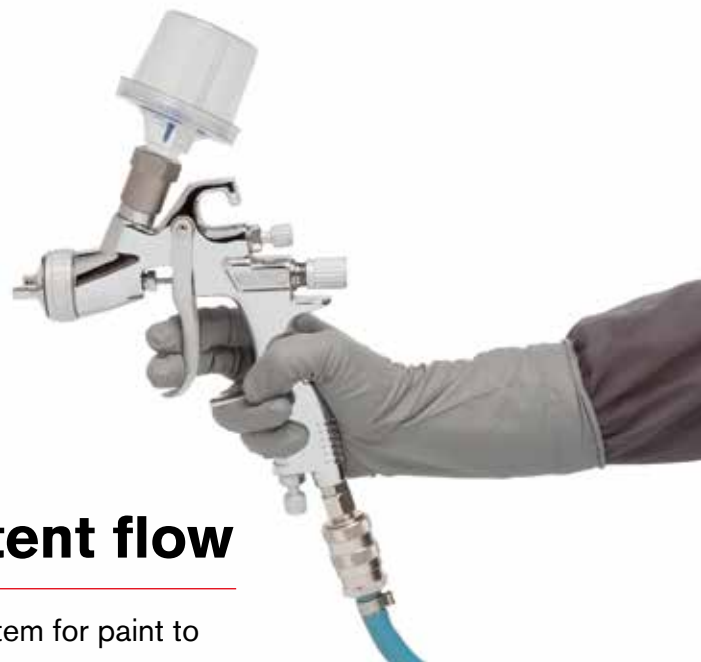

Consistent flow

the perfect system for paint to flow through.

With a unique valve and built-in strainer you'll have no more issues with inconsistent flow and sputtering output. Only stability!

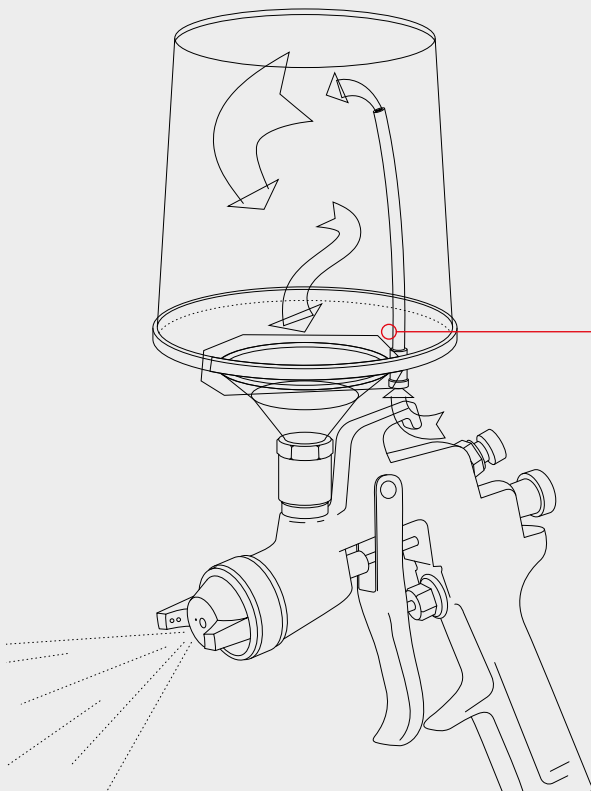




Snap Lid®

Capacity	Packing	90 µm	130 µm	190 µm	280 µm
350 ml	50 lids	9350090SL	9350130SL	9350190SL	9350280SL
700 ml	50 lids	9370090SL	9370130SL	9370190SL	9370280SL

Snap Lid System®

Capacity	Packing	90 µm	130 µm	190 µm	280 µm
88 ml	50 lids 50 cups 10 cover caps	93100090SLS	93100130SLS	93100190SLS	-
350 ml	50 lids 50 cups	9350090SLS	9350130SLS	9350190SLS	9350280SLS
700 ml	50 lids 50 cups	9370090SLS	9370130SLS	9370190SLS	9370280SLS
700 ml UV	25 lids 25 cups 25 cover caps	-	-	9370190SLSUV	9370280SLSUV
900 ml	40 lids 40 cups	-	9390130SLS	9390190SLS	-

The finishing touch

Product		Art. no.	Packing
Turbomix Paintsaver™		9500	512 pcs per box
Cover Caps		9370CAP	100 pcs per box
Universal Bracket		937020	per piece

6.2 ACCESSORIES



Snap Lid® Sealing Caps

9370CAP

Seal your Colad Snap Lid® temporarily with a Snap Lid® Sealing Cap. The cap fits perfectly on top of the Snap Lid® when removed from the spray gun. Use a second Snap Lid® Sealing Cap to seal your adapter and keep the paint channel dust-free. Packed in a plastic bag with 100 pieces.



Universal Bracket

937020

This Universal Bracket is a multi-purpose product. The bracket's hooks are designed to perfectly fit into the dispenser boxes and the handle of the Pump Sprayer Ultimate and Premium. Per piece.



Adapters for the Snap Lid System®

9370Axx

Matching adapters are available for most types of spray guns. Most popular adapters are articlenumbers: 9370A04, 9370A09 and the 9370A11. Do you have a question about the right adapter, please ask your local dealer.

Select your adapter on snaplid.com





Colad

Spray Gun Cleaning Kit 8817

A 17-piece kit that makes a perfect cleaning of spray guns possible. The kit contains several types of brushes and needles to clean the fluid tip, air cap, air passage and the exterior of your spray gun. It is now easy to remove paint from small gun parts. The outer part of the gun can also be cleaned with the end brush. Per set.



Colad

Spray Gun Cleaning Kit Premium Box 8822

A reusable box, 22-pieces, of brushes and other items for detailed cleaning work, enabling perfect cleaning of all types of spray guns and specially designed for HVLP spray guns. The box contains types of brushes and needles to clean the fluid tip, air cap, air passage and exterior of your spray gun. Storage in a reusable box, so all parts stay clean and are always easy to find. Per set.



Colad

Paint Touch-up Sticks

9910 ø 1.0 mm
9915 ø 1.5 mm
9920 ø 2.0 mm

The Paint Touch-up Sticks are an excellent tool for retouching small spots where the paint is damaged and needs a very minor paint repair. The tip of the stick is lint-free and made of non-absorbing fibres. The sticks can also be used for removing dust and cleaning very tiny car parts. 100 pieces per tube / 4 tubes in 1 box.



Colad

Dust Needle Set 9800

9810 Option: Refill Dust Needles, 10 pieces

This Colad Dust Needle Set is an effective tool for removing lint, dirt and dust from wet paint. Consisting of an aluminium pen / holder and 10 needles. Per piece.



Colad

Compressed Air Nozzle with Valve 10900

For exact positioning compressed air on the right spot. The Colad Compressed Air Nozzle with Valve is a perfect method to guide your compressed air towards the exact spot where the air is needed, without loss of pressure. Suitable for guiding the air on paint and putties. The nozzle can also be used for removing dust or use it for cooling down the temperature of objects. Per piece including air control valve.



Colad

Car Detailing Brush Kit 9900

For precise applying and touching up tiny quantities of paint and coatings for automotive projects. Each brush is made of natural (pony) hair for smooth and precise application of paint and coatings. The set contains 36 brushes in 3 types. The types are no. 1, no. 2 and no. 3. There are 12 pieces per type.



hamach
DUTCH ENGINEERING

Spray Gun Holder 000829

Suitable for two spray guns, suction and gravity feed guns. Multifunctional, removable and supplied with magnets to be fixed in the spray booth wall. Per piece.



hamach
DUTCH ENGINEERING

Blow Off Nipple 000882

Blowing gun to eliminate dust from the surface. Covered by rubber to protect the surface. Air connection 1/4". Per piece.



Colad

Spray Gun Holder 103511 Per piece.

Long-lasting protection

to keep the surface shiny and easy to clean



Silicone-free



Never miss a spot due to the UV Control Technology.



Colad

Surface Preparation 9067

This very effective cleaner and degreaser leaves the surface ready for Colad Ceramic Protection application. Colad Surface Preparation cleans, degreases, and prepares the surface for Colad Ceramic Protection application, helping to promote product adhesion and increasing its durability.

Application: The surface must be clean, preferably polished, free of scratches, holograms and imperfections. Apply the product directly to the surface or on a microfiber cloth, using a pressurized bottle. Allow the product to react for a few seconds. Clean the area using circular movements with a slightly dampened microfiber cloth.

Bottle: 1 Liter.

Colad

Ceramic Protection 9068

The silicon-free, highly durable coating with 9H hardness, for a strong long-lasting protection and an easy-to-clean surface.

Colad Ceramic Protection is suitable to treat any kind of metal, plastic, or painted surfaces. The product can be used inside the body shop because it is silicon-free, preventing contamination of paint applications. It creates a thin and resistant layer of ceramic protection on the treated surface. The product is easy to apply with the Microsuède Applicator Pad included, and you will never miss a spot since the product lightens up when exposed to any UV light, thanks to our UV Control Technology. Once well applied, one layer will protect the surface for up to 2 years or 50 washing cycles under normal conditions.

Packaging: Box containing 1 x 38 ml aluminium bottle + microsuède applicator pad + application manual + Sticker

Colad

Microsuède Applicator Pad 9069

Microsuède Foam Applicator Pad for applying liquid products. Colad Foam Applicator Pad consists of a foam pad covered with a low-absorption microsuède fabric, with the COLAD logo embossed in low relief. The pad is designed for the application of liquid and paste products of different viscosities, preventing scratching of the surface. Use of the pad is recommended when applying Colad Ceramic Protection. In a plastic bag with 6 pieces.



Polishing puts the finishing touch

to a painted surface.



7.1 POLISHING COMPOUNDS

inventing more

Colad

OneStepReady

8700 (1 kg bottle)
8725 (250 g bottle)

Covers the entire polishing process from fine sanding at the start to remove scratches, to a high gloss finish.

- One step polishing compound: efficient in use, you only need one micro polishing cloth and one polishing material
- Works excellently with both old and new coatings
- Can be used on all kinds of painted surfaces
- Solvent free



SCRATCH



POLISH



READY

Colad

Advanced Cut

8600 (1 kg bottle)

A harsh cutting compound that removes aggressive scratches, defects and surface imperfections in an instant!

- A quick solution for aggressive scratches and paint defects
- Not affecting clear coats, plastic & rubber parts so no need for time consuming masking
- Solvent free



7.2 OPTIMUS

Colad


Optimus

3881000 (Grit 1000)
3882000 (Grit 2000)
3883000 (Grit 3000)
3884000 (Grit 4000)

20 pieces per box.

A quick and safe solution for solving small paint defects. Can be used preliminary to the polishing process, to achieve a high gloss result and decrease the polishing time.

- A multifunctional, flexible abrasive
- The perfect solution for sanding angled and edged surfaces
- Limits the risk of pressure marks
- Suitable for both wet and dry sanding by machine or by hand
- Colour coded to easy identify the right grit

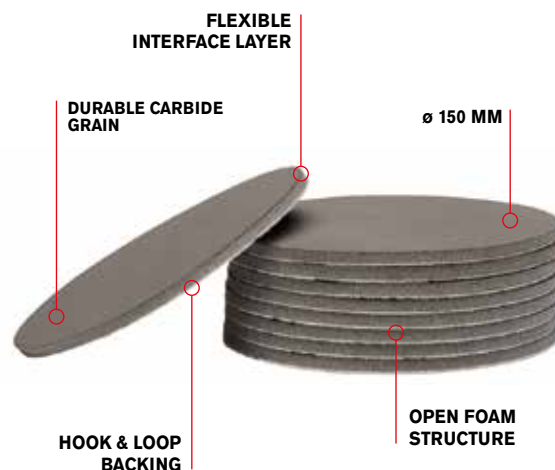

76 mm

**Colad****Foam Pad**

010057 (76 mm)

Foam pad medium for all kind of small jobs. Per piece in a bag.



150 mm

**Colad****Hard Foam Pad**

010050 (150 mm)

For hard jobs when you need to fix minor scratches. Per piece in a bag.

**Colad****Medium Foam Pad**

010051 (150 mm)

To polish old paints and areas without gloss. Per piece in a bag.

**Colad****Soft Foam Pad**

010052 (150 mm)

To get the highest gloss. Per piece in a bag.

190 mm

**Colad****Hard Foam Pad**

010053 (190 mm)

For hard jobs when you need to fix minor scratches. Per piece in a bag.

**Colad****Medium Foam Pad**

010054 (190 mm)

To polish old paints and areas without gloss. Per piece in a bag.

**Colad****Soft Foam Pad**

010055 (190 mm)

To get the highest gloss. Per piece in a bag.

**Colad****Support Pad M-14
Hook & Loop**

010034 (160 mm)

Pad screw M-14 to use with Foam Pads 010053, 010054 and 010055. Per piece in a bag.

**Colad****Support Pad 5/8
Hook & Loop**

010038 (160 mm)

Pad screw 5/8 to use with Foam Pads 010053, 010054 and 010055. Per piece in a bag.

**Colad****Support Pad M-14
Hook & Loop**

010037 (115 mm)

Pad for use with Foam Pads 010050, 010051 and 010052. Per piece in a bag.



Colad

Polishing Wipes

8880

These non-woven Polishing Wipes are designed to polish any kind of surface without scratching or leaving traces of residue. Since the wipes are without any additives, they are ideal for the polishing of painted surfaces, as well as all chrome, glass and interior details. Dimension 36.5 x 40 cm. 275 pieces on a roll.



Colad

Microfiber Polishing Cloths

8800

Very smooth cloths to clean rests of polishing material and puts the finishing touch to the surface. Re-useable: up to 500 wash cycles (60°C). Dimensions: 40 x 40 cm. Bag with 4 pieces.




Colad

Micro Polishing Discs

402815 (P1500, 35 mm, Hook & Loop)
402820 (P2000, 35 mm, Hook & Loop)
402825 (P2500, 35 mm, Hook & Loop)
100 discs in a box.

Specialised polishing cloths to clean rests of polishings material and put the finishing touch to the polished surface.

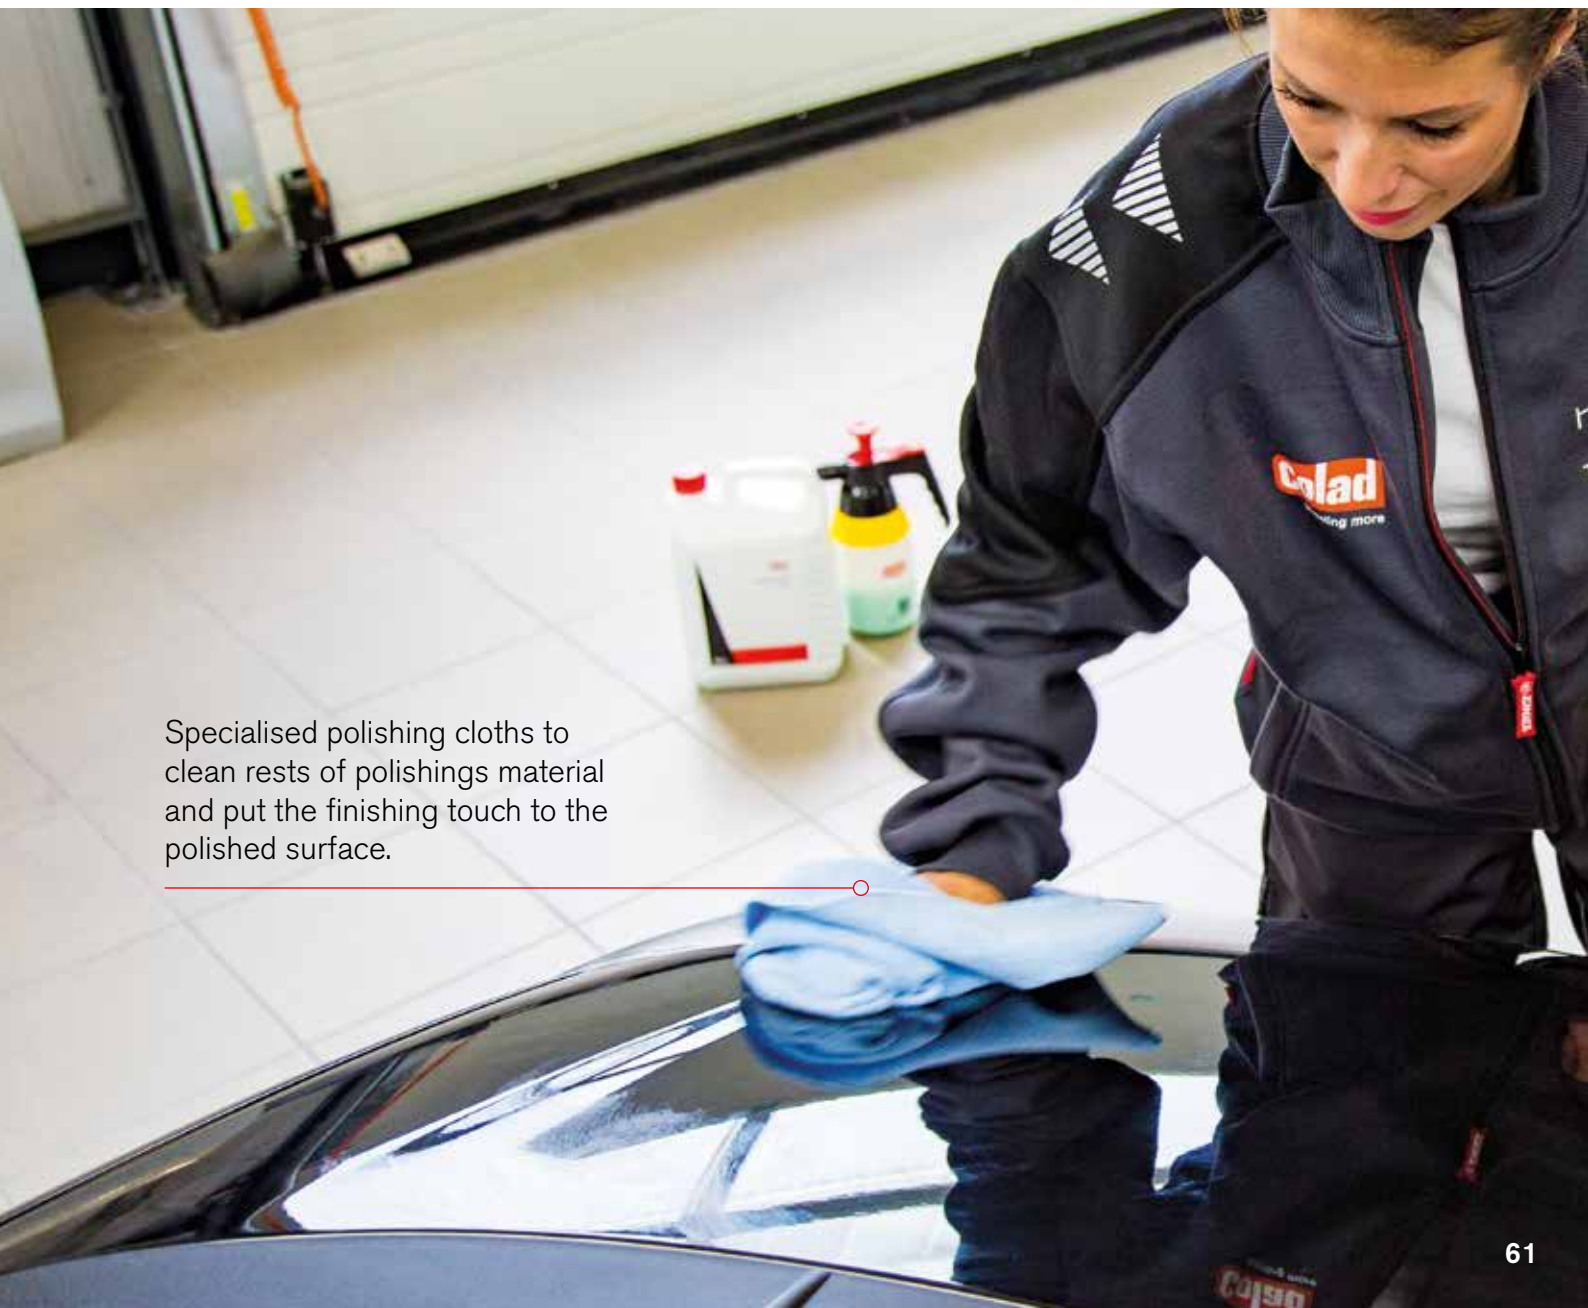

Safety equipment

with the highest level of comfort for a safe and healthy work experience.



8.1 PAINT OVERALLS



inventing more

BODYGUARD™

For a full day of working comfort and protection!



BEST PROTECTION

- Anti Static Coating (EN 1149-1:2006)
- Dust and Lint free
- Protects against overspray
- Tight fit to neck, sleeves and ankles cuffs



HIGH PERFORMANCE

- Perfect fit for all sizes
- Maximum movability
- Efficient body heat loss
- Comfortable for the entire working day



DURABILITY

- Durable, protected zipper



ATTRACTIVE APPEARANCE

- Grey colour
- Non-transparent
- Representative appearance



BodyGuard™ Premium Comfort Spray Overall

520046 (size 46)	520050 (size 50)	520054 (size 54)	520058 (size 58)	520062 (size 62)	520066 (size 66)
520048 (size 48)	520052 (size 52)	520056 (size 56)	520060 (size 60)	520064 (size 64)	520068 (size 68)



1% carbon thread for higher antistatic capacity!



Spacious but fitted hood for a more comfortable fit!



The best fit and highest comfort!

As you are used to, the BodyGuard™ has:

- Ultimate heat release capacities
- A highly durable blind zipper
- Durable grey nylon fabric
- With double zipper
- Soft, flexible cuffs
- Two back pockets
- Extra movability

The Colad BodyGuard™ Overall provides optimum protection against overspray and prevents pollution of the paint job by fibres, dust and lint.

Designed with the user in mind!

To guarantee you a full day of working comfort, this BodyGuard™ responds to the experiences of our users. We improved the antistatic capacity with a different type of fabric and redesigned the hood for a better fit!

Personal Protective Equipment (PPE)

Category I according to European Directive 2016/425/EU - Basic PPE protects against minimal risks. Protects against non-hazardous chemicals, like waterbased paints or harmless cleaning detergents.



According to 1149-3, Method 2: Induction decay time.



According to 1149-3,
Method 2: Induction decay time.

Colad

Nylon Spray Coat

510148 (size 48)
510152 (size 52)
510156 (size 56)
510160 (size 60)
510164 (size 64)

For use during paint jobs to protect the wearer against paint spray and to protect the paint job against fibers, dust and lint. White to prevent distortion of colour vision, very durable and well ventilated. One spray coat in a bag. Personal Protective Equipment (PPE) category I according to European directive 2016/425/EU – Basic PPE protects against minimal risks.



According to 1149-1,
Method 1: Measurement of
surface resistivity.

Colad

Carbon Spray Overall

511748 (size 48) 511758 (size 58)
511750 (size 50) 511760 (size 60)
511752 (size 52) 511762 (size 62)
511754 (size 54) 511764 (size 64)
511756 (size 56)

For use during paint jobs to protect the wearer against paint spray and to protect the paint job against fibers, dust and lint. White with carbon thread to prevent distortion of colour vision, very resistant and well ventilated. The carbon is added to reduce static electricity. One overall in a bag. Personal Protective Equipment (PPE) category I according to European directive 2016/425/EU – Basic PPE protects against minimal risks.



Colad

FR Spray Overall

512548 (size 48)
512552 (size 52)
512556 (size 56)
512560 (size 60)
512564 (size 64)

For use during paint jobs to protect the wearer against paint spray and to protect the paint job against fibers, dust and lint. White to prevent distortion of colour vision, very durable and well ventilated. A flame retardant product to be used when regulations require. One overall in a plastic bag. Personal Protective Equipment (PPE) category I according to European directive 2016/425/EU – Basic PPE protects against minimal risks.



Colad

Disposable Overall

530048 (size 48)
530052 (size 52)
530056 (size 56)
530060 (size 60)
530064 (size 64)

Per piece in a plastic bag.

Disposable overall for single use. Provides optimum protection against non-hazardous chemicals and protects the paint job against fibres, dust and lint. The overall is white to prevent distortion of colour vision. Water and dust resistant. Seals tightly due to the elastic in the hood, ankles and cuffs. Zipper fastening at the front. One overall in a bag. Personal Protective Equipment (PPE) Category I according to European directive 2016/425/EU – Basic PPE protects against minimal risks.



Colad

Nylon Spray Overall

510046 (size 46) 510058 (size 58)
510048 (size 48) 510060 (size 60)
510050 (size 50) 510062 (size 62)
510052 (size 52) 510064 (size 64)
510054 (size 54) 510066 (size 66)
510056 (size 56) 510068 (size 68)

For use during paint jobs to protect the wearer against paint spray and to protect the paint job against fibers, dust and lint. White to prevent distortion of colour vision, very durable and well ventilated. One overall in a bag. Personal Protective Equipment (PPE) category I according to European directive 2016/425/EU – Basic PPE protects against minimal risks.



According to 1149-3,
Method 2: Induction decay time.

8.1 PAINT OVERALLS

inventing more

Colad

BodyGuard™ Undershirt

Short sleeve:

540048 (size S)
540052 (size M)
540056 (size L)
540060 (size XL)
540064 (size XXL)
Per piece.

Sleeveless:

540148 (size S)
540152 (size M)
540156 (size L)
540160 (size XL)
540164 (size XXL)
Per piece.

The most comfortable shirt to wear under your paint suit! The Colad BodyGuard™ Undershirt is the perfect garment to wear under your Colad BodyGuard™ Paint Suit or any other paint suit. Made of heat regulating fabric that contains 1% carbon which gives the shirt anti-static properties, and prevents it from sticking to your body or paint suit. In contrast to regular cotton or nylon shirts, this undershirt does not attract dust. What's more, the tight fit guarantees optimum freedom of movement and makes it supremely comfortable to wear, even over the course of a full day's work.

- Tight, elastic fit for optimum freedom of movement
- Dust free, lint free, silicon free
- Does not attract dust
- Regulates body heat



8.2 HAND CLEANERS



Colad

Hand Cleaner

8235 (300 ml)
8290 (3.8 L)

A powerful Hand Cleaner, especially developed for quick removal of daily soiling. Moisturizes hands and prevents skin irritation. Removes easily soiling like grease, ink, adhesive, oil and paints. Contains natural scrubbing particles.



Different types of gloves

for optimal protection during every process.



Colad offers a complete range of gloves, suitable for all steps in the paint process. We categorize three types of gloves for different steps in the paint process:



Preparation:

For disassembly, assembly and preparation we provide you with the Colad Polyester Preparation Gloves. Colad Preparation Gloves offers protection against mechanical risks. The EN 388:2016 test indicates the abrasion, blade cut, tear and puncture resistance.



Painting:

Colad disposable nitrile gloves are especially developed for use during the paint process, offering comfort and protection for the user and protection against paint contamination.



Cleaning:

For cleaning with various chemicals, Colad advises to use their Industrial Nitrile or Neoprene gloves. These gloves are fitted with a soft, anti-allergic liner that prevents allergies and strengthens the gloves. Both Colad gloves are tested according to EN 374-1:2016 (type A chemical resistance), EN 374-4:2013 (degradation) and EN 374-5:2016 (bacteria and virus) which means they are leak-proof, protect against mechanical risks and chemical dipping (full contact).



Disposable Nitrile Gloves features:



Natural latex free

Our gloves marked with the latex free logo are natural latex-free. Absolutely safe to wear for people with a latex allergy.



Single use

Our gloves marked with the 'single use' logo are designed to be disposed after use. This prevents contamination and guarantees clean working.



Silicone free

Our gloves marked with the silicone-free logo are silicon free. This prevents contamination of the paint.



Powder free

Our gloves marked with the 'powder free' logo are washed 3 times during production. This makes them 100% powder free to prevent paint contamination.

Colad**Disposable Nitrile Gloves Grey**

538200 (size M)

538202 (size L)

538204 (size XL)


Dispenser box with 50 gloves.


- Thickness 8 mil (0.2 mm)
- Extra strong, extra flexible and higher tensile strength
- Extra long sleeves (300 mm)
- Textured surface for better grip
- Especially suitable for working with paints and solvents

This extra thick and extra strong nitrile glove is powder, silicon and latex free. It combines extra protection with extra comfort due to its high elasticity.

Personal Protective Equipment (PPE) CAT III according to European directive 2016/425/EU.
PPE of complex design protects against risks that cause irreversible damage to health.

**EU Type examination test results**

EN ISO 374-1: 2016 Type B  JKOPT	EN ISO 374-1:2016 + A1:2018 Type A	Level	EN 374-4:2013 Degradation
	96% Sulphuric Acid (L)	1	100 %
	n-Heptane (J)	3	37,3 %
	40% Sodium Hydroxide (K)	6	-12,2 %
	25% Ammonium Hydroxide (O)	2	-8,4 %
	30% Hydrogen Peroxide (P)	3	-6,6 %
	37% Formaldehyde (T)	5	2,8 %
Level 1: > 10 minutes	Level 4: > 120 minutes		
Level 2: > 30 minutes	Level 5: > 240 minutes		
Level 3: > 60 minutes	Level 6: > 480 minutes		

**Colad****Disposable Nitrile Gloves Black****Dispenser box with 60 gloves:**

536000 (size M)

536002 (size L)

536004 (size XL)

536006 (size XXL)

Dispenser box with 400 gloves:

536400 (size M)

536402 (size L)


536404 (size XL)


Colad Nitrile Gloves prevent hairs, skin fibres and skin grease from coming into contact with the paint and protect the user against chemical splashes.

- Thickness 6 mil (0.15 mm)
- Long sleeve (length 285 mm)
- Textured finger tips for better grip
- Free of powder, silicone and latex to prevent skin allergies
- Especially suitable for working with paints and solvents

Personal Protective Equipment (PPE) CAT III according to European directive 2016/425/EU.
PPE of complex design protects against risks that cause irreversible damage to health.

**EU Type examination test results**

EN ISO 374-1: 2016 Type B  JKPT	EN ISO 374-1:2016 + A1:2018 Type A	Level	EN 374-4:2013 Degradation
	n-Heptane (J)	3	47,4 %
	40% Sodium Hydroxide (K)	6	18,1 %
	30% Hydrogen Peroxide (P)	4	21,6 %
	37% Formaldehyde (T)	5	24,0 %
Level 1: > 10 minutes	Level 4: > 120 minutes		
Level 2: > 30 minutes	Level 5: > 240 minutes		
Level 3: > 60 minutes	Level 6: > 480 minutes		

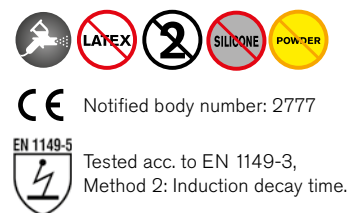

8.3.1 NITRILE GLOVES

inventing more

Colad

Disposable Nitrile Gloves Blue

530904 (size M)

530900 (size L)

530902 (size XL)

Dispenser box with 100 gloves.

A solvent-resistant quality glove that provides excellent protection.

- Thickness 4.5 mil (0.115 mm)
- Sleeve length 245 mm
- Textured finger tips for better grip
- Free of powder, silicone and latex to prevent skin allergies
- Especially suitable for working with paints and solvents



Personal Protective Equipment (PPE) CAT III according to European directive 2016/425/EU. PPE of complex design protects against risks that cause irreversible damage to health.

EU Type examination test results

EN ISO 374-1: 2016 Type B	EN ISO 374-1:2016 + A1:2018 Type A	Level	EN 374-4-2013 Degradation
 JKPT	n-Heptane (J)	2	52,7 %
	40% Sodium Hydroxide (K)	6	5,8 %
	30% Hydrogen Peroxide (P)	2	29,8 %
	37% Formaldehyde (T)	4	22,5 %
Level 1: > 10 minutes	Level 4: > 120 minutes		
Level 2: > 30 minutes	Level 5: > 240 minutes		
Level 3: > 60 minutes	Level 6: > 480 minutes		



Colad

Gloves Dispenser for 400 pieces

5364D

Wall dispenser only suitable for Colad Disposable Nitrile Gloves Black art. no. 53640x. Per piece.



Colad

Gloves Dispenser

5390

With the Colad Glove Dispenser several types of disposable gloves can be put away in an organized way. The dispenser can be easily mounted to the wall thanks to the two mounting holes (matching screws and fixings are included with every dispenser). The dispenser is made of recycled PP, which is an extra strong, unbreakable and recyclable plastic. The Glove Dispenser is suitable for the following gloves: Disposable Nitrile Gloves Black and Blue. Per piece.

Sturdy and robust

for safe preparation.



8.3.2 PREPARATION GLOVES

inventing more

Colad

Polyester Preparation Gloves

532000 (size M) (white)
532002 (size L) (black)
532004 (size XL) (blue)

The ideal gloves for assembly, disassembly and preparation. When it comes to preparation, the Colad Polyester Preparation Gloves are a must-have. They provide excellent protection against cuts and scratches during assembly, disassembly, preparation and light sanding jobs. The gloves are PU coated for extra grip during your jobs and the durable, breathable polyester material makes the gloves comfortable to wear. Per 12 pairs in a plastic sleeve, 120 pairs in outer box.

- Tight fit with elastic wrist-bands
- PU coated for extra grip
- Protect against cuts and scratches
- Breathable capacities for ventilation



Personal Protective Equipment: Category II according to EU regulation 2016/425/EU.

CE Notified body number: 0075

Mechanical hazard EN 388: 2016 EN 388 3121x	Abrasive wear	3	(Highest value = 4)
	Cut resistance	1	(Highest value = 5)
	Tear resistance	2	(Highest value = 4)
	Penetration resistance	1	(Highest value = 4)
	Cut resistance EN ISO 13997	x	(Highest value = F)

x means, that this glove was not tested for this requirement.

8.3.3 INDUSTRIAL GLOVES

Colad

Industrial Neoprene Gloves

5310000 (size L)
5310002 (size XL)

Resistant to most chemicals (frequent usage). Excellent grip and suitable for multiple use. Per pair.



EN ISO 374-1: 2016 Type A	EN ISO 374-1:2016 + A1:2018 Type A	Level	EN 374-4:2013 Degradation
	Methanol (A)	3	3.8 %
	n-Heptane (J)	1	30.8 %
	40% Sodium Hydroxide (K)	6	-0.1 %
	96% Sulphuric Acid (L)	4	23.5 %
	65% Nitric Acid (M)	6	19.3 %
	99% Acetic Acid (N)	5	19.0 %
	25% Ammonium Hydroxide (O)	3	-12.9 %
	30% Hydrogen Peroxide (P)	6	-2.8 %
	40% Hydrofluoric Acid (S)	6	x
	37% Formaldehyde (T)	6	6.7 %
Level 1: > 10 minutes	Level 4: > 120 minutes		
Level 2: > 30 minutes	Level 5: > 240 minutes		
Level 3: > 60 minutes	Level 6: > 480 minutes		

EN388:2016	Abrasion resistance	Level 3
	Blade cut resistance	Level 1
	Tear resistance	Level 1
	Puncture resistance	Level 0

Personal Protective Equipment (PPE) CAT III according to European directive 2016/425/EU. PPE of complex design protects against risks that cause irreversible damage to health.



CE Notified body number: 2777

Colad

Industrial Nitrile Gloves

5330000 (size L)
5330002 (size XL)

Recommended when you are in continuous contact with solvents. Resistant to most chemicals. Excellent grip and moulded to the contours of the hand. Highly comfortable and suitable for multiple use. Per pair.



EN ISO 374-1: 2016 Type A	EN ISO 374-1:2016 + A1:2018 Type A	Level	EN 374-4:2013 Degradation
	Methanol (A)	2	70.1%
	Toluene (F)	1	81.8%
	n-Heptane (J)	6	0.0%
	40% Sodium Hydroxide (K)	6	4.5%
	96% Sulphuric Acid (L)	3	61.9%
	65% Nitric Acid (M)	2	98.7%
	99% Acetic Acid (N)	3	91.9%
	25% Ammonium Hydroxide (O)	6	-5.8%
	30% Hydrogen Peroxide (P)	6	-11.7%
	37% Formaldehyde (T)	6	-15.6%
Level 1: > 10 minutes	Level 4: > 120 minutes		
Level 2: > 30 minutes	Level 5: > 240 minutes		
Level 3: > 60 minutes	Level 6: > 480 minutes		

EN388:2016	Abrasion resistance	Level 4
	Blade cut resistance	Level 1
	Tear resistance	Level 0
	Puncture resistance	Level 1

Personal Protective Equipment (PPE) CAT III according to European directive 2016/425/EU. PPE of complex design protects against risks that cause irreversible damage to health.



CE Notified body number: 2777

Respiratory and spray masks

for optimal, complete protection throughout the process.



Colad

Respirator with A2P3 filters inclusive built-in pre-filter*

502100

Respirator that protects against the inhalation of isocyanate from paint or solvents for an effective respiratory personal protection. Fits perfectly around the nose and mouth. Complete with 2 A2P3 filters with built-in pre-filter. Complies with the EN 140 standard, CE-marked: 0082. The 2 A2P3 filters can be replaced with article number 5021.



Colad

A2P3 filters inclusive built-in pre-filter

5021

Set of 2 A2P3 filters with built-in pre-filter. For respirator art. no. 502100. Use the filters for maximum 40 hours, then replace the filters. The filters comply with EN 14387 (Gas Filters and Combined Filters) and are CE-marked: 0161. Package: per 2 pieces.



Colad

Respirator A1P2*

5000

Protects against the inhalation of isocyanate from paint or solvents. Fits perfectly around the nose and mouth. Maximum usage 40 hours. Complies with the EN 140 standard, CE-marked: 0082. One mask in an air-tight storage box with 2 carbon filters A1 and 20 pre-filters P2.



Colad

Active Carbon Filters A1

5020

The filters comply with EN 14387 (Gas Filters and Combined Filters) and are CE-certified. CE-marked: 0161.



Colad

Disposable Respirator A1*

506600

Disposable Respirator for protection from harmful paint or solvent vapors. Fits perfectly around the nose and mouth. Maximum usage 40 hours. Complies with the strict EN 140 standard, CE-marked: 0082. With 2 pieces of A1 carbon filters. The filter cartridge complies with the strict EN 14387 standard, CE marked: 0161. Per piece in a bag.



Colad

Pre-filter P2

5010









50 pieces in a bag. The filters comply with EN 14387 (Gas Filters and Combined Filters) and are CE-certified. CE-marked: 0161.



8.4 MASKS

inventing more



				
				
Fine Dust Masks	Fine Dust Mask*	Fine Dust Mask with valve*	Fine Dust Mask with valve and active carbon*	Fine Dust Mask with valve*
Art. no.	5510	5520	5525	5530
Packaging	20 pieces	12 pieces	12 pieces	12 pieces
Dust classification	FFP2	FFP2	FFP2	FFP3
Filtration	>94%	>94%	>94%	>99%
MAC-coding	10 x	10 x	10 x	50 x
Protection	Liquid aerosols and solids, non-toxic, medium toxicity	Liquid aerosols and solids, non-toxic, medium toxicity	Liquid aerosols and solids, non-toxic, medium toxicity. Gases and vapours.	Liquid aerosols and solids, non-toxic, medium toxicity
Single use, max. 8 hours	✓	✓	✓	✓
Main component	Non-woven	Non-woven	Non-woven / active carbon	Non-woven
Directive PPE regulation 2016/425/EU	✓	✓	✓	✓
PPE Category III	✓	✓	✓	✓
Harmonised norm 149:2001 + A1:2009	✓	✓	✓	✓
Synthetic head band	✓	✓	✓	✓
Adjustable nose clip	✓	✓	✓	✓
Exhalation valve	—	✓	✓	✓
Active carbon	—	—	✓	—

*Personal Protective Equipment (PPE) CAT III according to European directive 2016/425/EU. PPE of complex design protects against risks that cause irreversible damage to health.

8.5 MISCELLANEOUS



Spray Caps Large 5120

Protects head and neck during sanding and spraying. Cotton, pleasant to wear and washable. Per 5 pieces.





Safety Goggles** 5085

Adjustable safety goggles with polycarbonate lenses. Provide optimum protection and clear vision while working. Frame: CE SGI 166 F. Lens: CE 2C-1.2 SGI 1F. Optical class: 1 (suitable for continuous use). Mechanical strength: F (impact protection against particles with high speed and low energy – 45 m/s). EN 166 safety specification. Per piece.





UV Safety Goggles** 5087

UV Safety Goggles provide optimum eye protection while using UV tools. These UV Safety Goggles shield the user's eyes from the impact of UV radiation. While working, they also offer protection to the eyes from flying materials. The clear, dark lens combines optimum vision with high protection, and the adjustable legs provide optimum comfort and create the perfect fit. Per piece.



**Personal Protective Equipment (PPE) CAT II according to European directive 2016/425/EU. PPE of intermediate design, protecting against intermediate risks to health.

Our undercoatings are flexible

and most of them can be easily over-painted.

Excellent protection against stone chips, rust and brine.



9.1 UNDERCOATING

inventing more



Colad

Undercoating M80

4010 (1 L) (Black)
4020 (1 L) (White)
4030 (1 L) (Grey)

Undercoating with anti-corrosion and noise reduction properties. Material made of rubber and resins. After drying, the coating is paintable. The coating offers excellent protection against climatic influences and against gravel and stone chips. 1 L tin with spray connection (suitable for +/- 2.5 m²).



Colad

Undercoating Spray Gun Adjustable

90672674

Gun for the application of undercoating and cavity protection products in tins of one L. Gun with an air connection and a nozzle to apply the product on the surface. This gun is also equipped with an adjustable nozzle to adapt the spray pattern. Per piece.



Colad

Undercoating M40

4000 (1 L) (Black)

Protects against corrosion and salt. Noise-absorbing, flexible and chip-resistant. 1 L tin with spray gun connection.



Colad

Disposable Undercoating Spray Gun

90672682

Gun for coating application with disposable tube and nozzle. Saves cleaning time and costs. Includes disposable and replaceable tube and nozzle. Per set.



Colad

Allround Neoprene Putty

4060 (1 kg) (Grey)
4070 (Nylon Brush)

Allround Neoprene Putty is a petrol and oil resistant compound. While remaining elastic after drying, brush and spray textures are retained. Allround Neoprene Putty is repaintable. Application: seals body panel joints, e.g. in the trunk of a car and other parts of the bodywork. Allround Neoprene Putty is an excellent adhesive and resists temperatures ranging from -25°C to +80°C. Allround Neoprene Putty is delivered ready for use. Directions for use: Apply Allround Neoprene Putty to a clean, dry, oil-free surface. 1 kg can.



Colad

Disposable Tubes and Nozzles

90672690

Tubes and Nozzles for the disposable undercoating spray gun. Set consists of 6 tubes and nozzle.

9.2 MAGIC FIX



Colad

Magic Fix Glue and Filler

4325


Long lasting repair in seconds with an ultra strong sandable and paintable result. Magic Fix is a glue and filler for a fast and strong repair of various materials. Repair (almost) everything with Colad Magic Fix. It is a super glue to be combined with black and grey reinforcement powder. If it's worth repairing: Fix it, Sand it, Paint it! Ready!

Use Colad Magic Fix for glueing, filling and repairing of various materials such as steel, plastics, aluminium, fibreglass, carbon fibre, plastics and rubber. Fill cracks or spaces with Magic Fix for example on: car bumper fixing points. Magic Fix content: Glue (A) 6 pcs 10 ml, Reinforcement Powder (B) 2 pcs Black 22 g and 1 pc Grey 22 g.



Plastic spreaders are specially designed

for the application of putties.



For flat and wavy surfaces.

9.3 SPREADERS

inventing more

Colad

Plastic Spreaders

9105 (flexible red)
9107 (super flexible black)
9106 (flexible red)
9108 (super flexible black)

These spreaders are specially designed for the application of putties.

- Use the flexible spreader for flat surfaces
- Use the super flexible spreader for curved surfaces
- Made of plastic to avoid scratch in the surfaces
- With flattened spread-edge including grip



Art. no.	Pieces	Display	Colour	Type
9105	5 pieces per set	yes (25x5 pieces)	red	flexible
9107	5 pieces per set	yes (25x5 pieces)	black	super flexible
9106	100 piece per carton	-	red	flexible
9108	100 pieces per carton	-	black	super flexible

Colad

Mixing Board

000846

Mixing board specially developed for preparing filler. Compact, handy and clean. Use new paper for every job. Per 100 mixing sheets.



Colad

Japanese Putty Knives

9100

Japanese knives for spreading putty. Made of first class quality steel; very flexible, with grip. Per set of 4 pieces in different sizes.



Colad

Rubber Squeegees

9130

Rubber Squeegees specially designed for application of putties to achieve a very smooth finish. Dimensions 95 x 65 mm. Per piece.



9.4 FASTENERS

Colad

Permanent Attachment Tape (9 m)

900509 (9 mm)
900512 (12 mm)

Transparent double-face tape, for attaching strips, registration plates and accessories to cars. Clear, permanent bonding, double-sided film. Thin and highly durable. Quick and simple to apply. Resulting in an appearance equal to O.E.M. standards. Per roll in a plastic bag.



Colad

Double-faced Acrylic Foam Tape (10 m)

901006 (6 mm)
901009 (9 mm)
901012 (12 mm)
901019 (19 mm)
901025 (25 mm)

Double side foam tape, to attach strips, registration plates and accessories to cars. Weather resistant. Per roll in a plastic bag.



Colad

Self Adhesive Noise Absorbing Sheets

4050

Colad Self Adhesive Noise Absorbing Sheets are designed to be applied to the interior sheets metal of car doors, trunk, car roofs etc. These sheets are made of 100% heat resistant bitumen. Excellent noise and vibration reduction properties. Colad Noise Absorbing Sheets are repaintable. Thickness: 2.2 mm. Per box of 8 sheets of 250 mm x 500 mm.



Optimum protective combinations

for a clear spray booth that ensures the highest achievable spray result.

Always a clean working environment




Spray Booth Maintenance Solutions

Perfect results demand perfect circumstances.

A perfectly spotless paint-job needs a well maintained spray booth. Over the years Colad has developed five optimum protection combinations to help you keep your booth clean and the quality of your paint jobs as high as possible. Whether you want to keep your brand-new paint spray booth as clean as possible, restore your ageing spray booth to like-new condition, or prevent dust from swirling onto paint-jobs; the innovative Spray Booth Maintenance Solutions by Colad® will help you protect your investment, keep your booth clean and guarantee better paint-jobs.

Find your optimum protective combination:

Product overview


	Article	Protection time*	Suitable for	Color	Tacky
 DRY					
Protect your well-maintained booth from overspray!					
Film4Booth	6860 - 90 cm x 84 m	1000 booth cycles or 1 year*	Walls, windows and lights	Transparent	No
Dust Control	8210 - 10 L	48 hours per application*	Floor	Transparent	Yes
 HYBRID					
Give your discolored booth a brand new look and feel!					
Option A: Hybrid					
Blizzard White Peelable Booth Coating	8145 - 10 L	250 booth cycles or 3 months*	Walls	White	No
Ice Transparant Peelable Booth Coating	8146 - 5 L	250 booth cycles or 3 months*	Windows and lights	Transparent	No
Dust Control	8210 - 10 L	48 hours per application*	Floor	Transparent	Yes
Option B: Hybrid / Dry					
Blizzard White Peelable Booth Coating	8145 - 10 L	250 booth cycles or 3 months*	Walls	White	No
Light and Window Wrap	6861 - 46 cm x 42 m	250 booth cycles or 3 months*	Windows and lights	Transparent	No
Dust Control	8210 - 10 L	48 hours per application*	Floor	Transparent	Yes
 WET					
Protect your well-maintained booth from overspray!					
Option A: Tacky					
Antidust	8142 - 5 L 8141 - 10 L 8140 - 20 L	85 booth cycles or 1 month*	Walls, windows and lights	Transparent	Yes
Dust Control	8210 - 10 L	48 hours per application*	Floor	Transparent	Yes
Option B: Tacky - Premium					
Antidust Premium	8139 - 20 L	85 booth cycles or 1 month*	Walls, windows and lights	Transparent	Yes
Antidust Premium White	8138 - 20 L	85 booth cycles or 1 month*	Walls	White	Yes
Dust Control	8210 - 10 L	48 hours per application*	Floor	Transparent	Yes

* This is an indication, may vary depending on the circumstances.



A protective solution

that is applied dry to protect a well-maintained booth, protecting your walls from overspray.

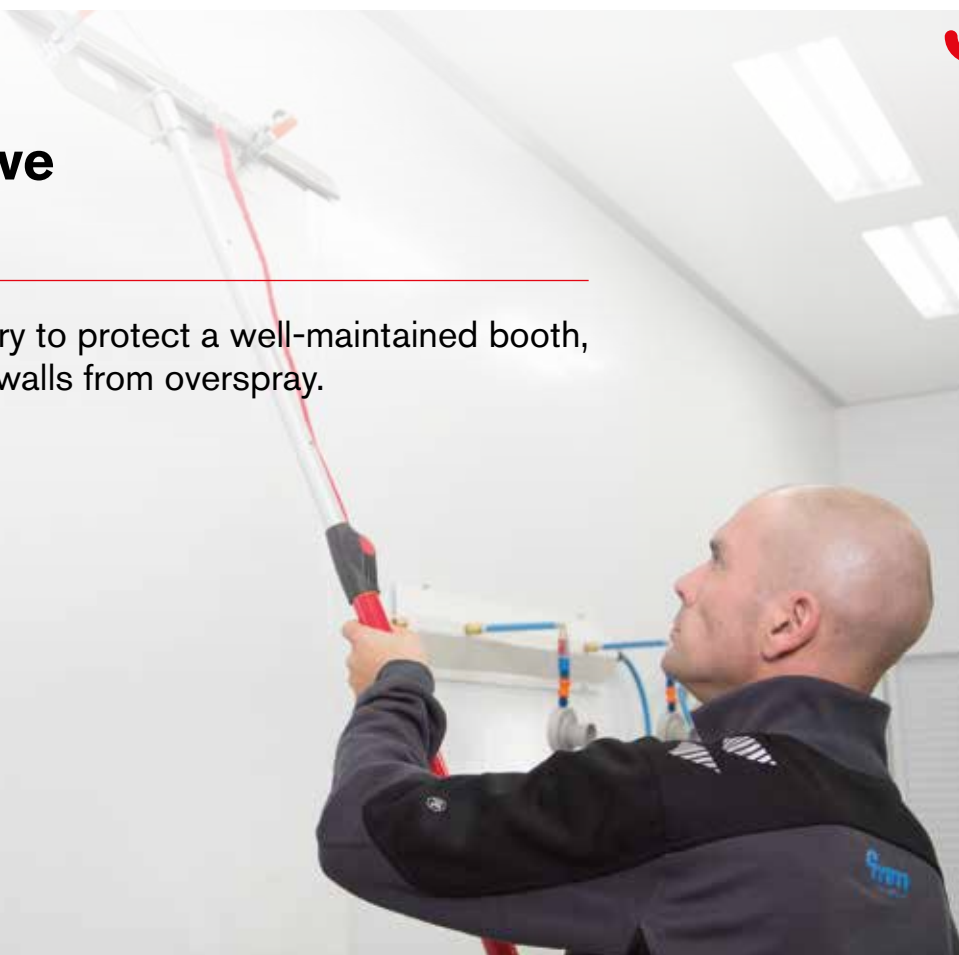

A complete solution for maintaining your spray booth!

Colad

6900 Foil Dispenser
6950 Foil Applicator
2070 Magnetic Foil Cutter
9105 Plastic Spreader (5 pieces)
6880 Tape (3 rolls)



Self-Adhesive: easy to apply and remove on booth walls, lights and windows to keep your booth in like-new condition. Does not leave adhesive residue.



Four easily removable layers each one last months, providing one-year of protection in total.



Each transparent anti-static polypropylene layer is treated with paint adhesion to trap overspray.



Film4Booth

6860 (90 cm x 84 m) (including 6 rolls of tape)

A transparent, protective, self adhesive film that can be applied to mask your booth walls. Protects your walls from overspray and is easily removed by simply peeling off the layers one by one when contaminated.

Features & Benefits

- Keeps your walls clean
- 4 layers for a longer protection time
- Can be applied over lights and windows
- Easy to remove by peeling off each layer
- Treated with paint adhesion
- Easy to apply



Colad Film4Booth is not conductive. To identify if Film4Booth is suitable to apply in your ATEX working area, the user has the responsibility to identify and assess the risks involved applying the product in his process, following the ATEX user directive 99/92/EG. Please refer to the Technical Datasheet for exact specifications.



CONSUMPTION

1 roll = 75.6 m²



AMOUNT OF LAYERS

4 layers in 1
(All layers are numbered)



APPLICATION METHOD

By hand with applicator and dispenser



APPLICATION

Spray Booth Walls

Color	Tacky	Instructions for application	Removal	Protection time
Transparent	No	Make sure the surface is clean and grease-free. Can be applied in the same way as wallpaper. Cover the overlapping parts with the included booth tape.	Remove by peeling the film from the wall layer by layer. Re-tape the overlapping parts with the booth tape to prevent contamination.	1000 booth cycles or 1 year



Dust Control

8210 (10 L can)

A static clear solution for spray booths floors and preparation areas. Specially designed to keep dust and dirt down on the floor to prevent dust from swirling during the paint job.

Features and Benefits

- Keeps your floor clean
- Static formula adheres dust and dirt
- Ready to apply



HUMIDITY

≥ 60% RH



CONSUMPTION

50 m²/L



NUMBER OF COATS

Recommended coat thickness: 10 micron.
Recommended number of coats: 1. Apply every other day for the best results. Allow to dry at room temperature.



APPLICATION METHOD


Apply with a pressure sprayer.



APPLICATION

Spray Booth Floor

Color	Tacky	Instructions for application	Removal	Protection time
Transparent	Yes	Make sure the floor of the spray booth is clean and grease-free. Shake well and apply as mentioned.	Remove by mopping with water or water with an alkaline cleaner.	Apply one layer every other day. Clean the floor completely every month.



A protective solution

that is applied wet, but dries as a peelable layer.

Option A: Hybrid

Option B: Hybrid / Dry

Give your booth a brand new look!

Before

After

Colad

Blizzard White Peelable Booth Coating

8145 (10 L)

A white, protective coating that forms a strong layer on your booth walls. Protects your walls from overspray, gives them a bright appearance and easy to remove by simply peeling off the layer.

Features and Benefits

- Keeps your walls clean
- White for optimum reflection
- Easy to remove by peeling off the layer
- Ready to apply



Combine with
Dust Control



HUMIDITY

≥ 60% RH



CONSUMPTION

1 layer = 6.66 m²/L
all other = 16 m²/L



NUMBER OF COATS

Recommended coat thickness: 150 micron. Apply twice until a minimum of 150 micron coat is achieved. Advised amount of coats: First coat in advised micron. Multiple coats can be applied on top of each other (till a maximum of 6 coats) to regain whiteness. All extra coats can be applied in approx. 65 micron. Drying at room temperature.



APPLICATION METHOD

Apply with spray gun, airless system, brush or paint roller.



APPLICATION

Spray Booth Walls

Color	Tacky	Instructions for application	Nozzle size	Removal	Protection time
White	No	ZMake sure the walls of the spray booth are clean and grease-free. Mask all transparent parts such as lights and windows. Stir well and apply as mentioned.	Airless: nozzle 417, 100-150 bar spray pressure. Spray gun: nozzle 2.5, 3 bar spray pressure.	Carefully peel of the individual layer. Any residue can be removed with warm water or high pressure sprayer.	250 booth cycles or 3 months.

Option A: Hybrid

Combine Blizzard White Peelable Booth Coating with a transparent coating.

Cover a standard spray booth* with:

- 1 x 8145 - Blizzard White Peelable Booth Coating
- 1 x 8146 - Ice Transparent Peelable Booth Coating

**Colad****Ice Transparent Peelable Booth Coating**

8146 (5 L can)

A transparent, protective coating that forms a strong layer. Protects your lights and windows from overspray and can easily be removed by peeling off the layer.

Features & Benefits

- Keeps your lights and windows clean
- Easy to remove by peeling off the layer
- Ready to apply



Combine with
Dust Control

**HUMIDITY**

≥ 60% RH

**CONSUMPTION**

4 - 6 m²/L

**NUMBER OF COATS**

Recommended coat thickness: Apply twice until a minimum 150 micron coat thickness is achieved. The applied material will have a milky color. This will turn transparent once dry. Don't apply multiple coats on top of each other. This will reduce opacity and light efficiency. Allow to dry at room temperature.

**APPLICATION METHOD**

Apply with spray gun, airless system, brush or paint roller.

**APPLICATION**

Windows and Lights

Color	Tacky	Instructions for application	Nozzle size	Removal	Protection time
Transparent	No	Make sure the windows and lights of the spray booth are clean and grease-free. Stir well and apply as mentioned.	Airless: nozzle 417, 100-150 bar spray pressure. Spray gun: nozzle 2,5, 3 bar spray pressure.	Peel of the layer gently. Overspray can be removed with warm water or high pressure sprayer.	250 booth cycles or 3 months.

Option B: Hybrid / Dry

Combine Blizzard White Peelable Booth Coating with a transparent wrap.

Cover a standard spray booth* with:

- 1 x 8145 - Blizzard White Peelable Booth Coating
- 1 x 6861 - Light and Window Wrap



Combine with
Dust Control

**Colad****Light and Window Wrap**

6861 (Roll: 46 cm x 42 m)

A transparent, protective 4 layer film to protect your booth lights and windows. Easy to remove by simply peeling off the layers one by one.

Features and Benefits

- Keeps your lights and windows clean
- Easy to remove by peeling off the layers one by one
- Easy to apply

**CONSUMPTION**

1 roll = 19 m²

**AMOUNT OF LAYERS**

4 layers in 1 (All layers are numbered)

**APPLICATION METHOD**

By hand

**APPLICATION**

Windows and Lights

Color	Tacky	Instructions for application	Removal
Transparent	No	Make sure the windows and lights are clean and grease-free. Can be applied in the same way as wallpaper.	Remove by peeling the film from the wall layer by layer. Lights and/or Windows

* Standard spray booth has a size of 75 m²



Clear, protective solutions

that can be applied wet. Ideal to protect the walls of a well-maintained booth.

Option A: Tacky

Option B: Tacky - Premium

Option C: Non-Tacky

Protect your well-maintained booth from overspray!

Option A: Tacky

The Colad Tacky solution keeps your booth walls clean by forming a transparent, protective layer to protect your walls from overspray. The layer stays tacky and captures all the dust particles swirling around the booth. Colad Antidust guarantees that your spray booth walls stay tacky up to 1 month or 85 booth cycles.

Colad

Antidust

8142 (5 L)

8141 (10 L)

8140 (20 L)



A transparent, protective coating with tacky properties, that forms a tacky layer on your booth walls. Protects your walls from overspray and captures swirling dust particles due to the tacky formula.

Features and Benefits

- Keeps your walls clean
- Tacky formula adheres overspray, dust and dirt
- Ready to apply
- Silicone free

Colad

Dust Control

8210 (10 L)



A static clear solution for spray booths floors and preparation areas. Specially designed to keep dust and dirt down on the floor to prevent dust from swirling during the paint job.

Features and Benefits

- Keeps your floor clean
- Static formula adheres dust and dirt
- Ready to apply



HUMIDITY

≥ 60% RH



CONSUMPTION

10 - 12 m²/L



NUMBER OF COATS

Recommended coat thickness: 100-125 micron.
Recommended number of coats: 1 or 2 depending on application thickness.



APPLICATION METHOD

Apply with a spray gun, brush or paint roller.



APPLICATION

Spray Booth Walls

Color	Tacky	Instructions for application	Nozzle size	Removal	Sidenotes	Protection time
Transparent	Yes	Make sure the walls of the spray booth are clean and grease-free. Shake well and apply as mentioned.	Spray gun: nozzle 1.8-2.0, 2-3 bar spray pressure.	Remove with hot water or steam cleaner.	Regular temperature increases cause Antidust to dry out quicker (> 60-65 °C).	85 booth cycles or 1 month.



Option B: Tacky - Premium

The Colad Tacky Premium solutions keep your booth walls clean by forming a protective layer to protect your walls from overspray. The layer stays tacky and captures all the dust particles swirling around the booth. These solutions protect better during low humidity conditions like winter periods. They guarantee that your spray booth walls stay tacky up to 1 month or 85 booth cycles.

Colad

Antidust Premium

8139 (20 L)



Antidust Premium protects better during low humidity conditions, for instance during winter periods. A transparent, protective coating with tacky properties, that forms a tacky layer on your booth walls.

Features and Benefits

- Keeps your walls clean
- Tacky formula adheres overspray, dust and dirt
- Improved formula, protects better during low humidity conditions.

Colad

Antidust Premium White

8138 (20 L)



Antidust Premium White protects better during low humidity conditions, for instance during winter periods. A white, protective coating with tacky properties, that forms a tacky layer on your booth walls. The White component in the formula creates a white layer on your walls, making the spray booth look like new again!

Features and Benefits

- Keeps your walls clean
- Makes the spray booth look like new again
- Improved formula, protects better during low humidity conditions.



HUMIDITY

≥ 60% RH



CONSUMPTION

10 - 12 m²/L



NUMBER OF COATS

Recommended coat thickness: 100-125 micron.
Recommended number of coats: 1 or 2 depending on application thickness.



APPLICATION METHOD


Apply with a spray gun, brush or paint roller.



APPLICATION

Spray Booth Walls

Color	Tacky	Instruction for application	Nozzle size	Removal	Sidenotes	Protection time
8139: Transparent 8138: White	Yes	Make sure the walls of the spray booth are clean and grease-free. Shake well and apply as mentioned.	Spray gun: nozzle 1.8-2.0, 2-3 bar spray pressure.	Remove with hot water or steam cleaner.	Regular temperature increases cause Anti-dust to dry out quicker (> 60-65 °C).	85 booth cycles or 1 month.



Several products to protect your Spray Booth

from dust particle and other contamination.





Film4Floor

6865 (90 cm x 150 m)

6864 (60 cm x 50 m)

A self-adhesive strong and durable white film. Makes cleaning very easy.

- White satin finish for optimum reflection
- Strong and durable (100 micron)
- Treated with paint adhesion.
- Easy to apply and cut
- Solvent resistant
- Anti-slip surface
- Easy to remove, does not leave adhesive residue
- Can be used in combination with Dust Control to eliminate dust
- Not anti-static

Colad Film4Floor is not conductive, to identify if Film4Floor is suitable to apply in your ATEX working area, the user has the responsibility to identify & assess the risks involved applying the product in his process, following the ATEX user directive 99/92/EG. Please refer to the Technical Datasheet for exact specifications.



Pressure Sprayer

8300

Designed to apply Colad Dust Control. It is fitted with Viton O-rings for durability and has a 5 L capacity. Automatic safety valve protects against over-pressure. Per piece.



Complete professional
mixing room solutions.

hamach
DUTCH ENGINEERING



THINKING
OUT OF
THE BOX

Mixing room equipment and extraction systems from Hamach offer the complete professional mixing room solution.

All equipment is manufactured in polished stainless steel to avoid paint contamination, prevent rust and allow easy cleaning. The complete solution includes tables, washing machines, can containers, all the extraction tubes and fans to renew the air in the mixing room. Consult with our experts to get a quote for your new clean and efficient mixing room. High quality and compliance with all environmental regulations are guaranteed. Hamach stainless steel mixing room equipment is the best solution for a safe and clean mixing area that conforms to current regulations.



ATEX Directive 2014/34/EU

When a mixture of air gases, vapours, mists, or dusts combine in a way that they can ignite under certain operating conditions a potentially explosive atmosphere arises. Working in such an environment demands certified equipment, equipment that Hamach supplies.

Most of our Hamach products are available as certified ATEX Directive 2014/34/EU. This means that they are for use in potentially explosive atmospheres like spray booths or mixing rooms. The directive defines the essential health and safety requirements and therefore guarantees you a safe and healthy environment to get the most out of your expertise.

A wide variety
of stainless steel

hamach
DUTCH ENGINEERING












**THINKING
OUT OF
THE BOX**

Hamach offers a wide variety of high quality standard mixing room equipment made of stainless steel.

See the workstations, cleaners, ventilators, scale tables and more. We also are well known for our tailor made mixing room solutions. If you want a mixing room facility that fastens and fits perfectly into your daily work process, then ask us for a solution just designed for your company.



OVERVIEW WORK BENCHES

Art. no.		Description	Prepared for fume extraction Ø 180 mm	Fume extraction across the whole width	Width (cm)	Height (cm)	Depth (cm)	
000463		Stainless Steel Work bench - open	Yes, with cover	Yes	120	91	60	41 kg
000465		Stainless Steel Work bench - 2 doors	Yes, with cover	Yes	120	91	60	81 kg
000463-01		Stainless Steel Work bench - open	N/A	N/A	120	91	60	30 kg
000465-1		Stainless Steel Work bench - 2 doors	N/A	N/A	120	91	60	70 kg
000460		Stainless Steel Work bench - open	Yes, with cover	Yes	180	91	60	60 kg
000462		Stainless Steel Work bench - 2 doors	Yes, with cover	Yes	180	91	60	105 kg
000460-1		Stainless Steel Work bench - open	N/A	N/A	180	91	60	45 kg
000462-1		Stainless Steel Work bench - 2 doors	N/A	N/A	180	91	60	90 kg

hamach
DUTCH ENGINEERING




HS Spray Board

Spray board that is suitable for spraying small parts, such as spray samples. Suitable for wall mounting or mounting on Hamach Stainless Steel tables.

- Stainless Steel
- Size extraction point: Ø 180 mm
- Equipped with:
 - pressure regulator
 - a manometer



OVERVIEW SPRAY BOARDS

Art. no.		Description	Prepared for fume extraction Ø 180 mm	Fume extraction across the whole width	Width (cm)	Height (cm)	Depth (cm)	
000478		HS Spray Board 120 cm	Yes	Yes	120	74	20/44	30 kg
000479		HS Spray Board 180 cm	Yes	Yes	180	74	20/44	40 kg

Also for the bigger
and tougher jobs

hamach
DUTCH ENGINEERING



THINKING
OUT OF
THE BOX



Computer Scale Table

000468

Computer scale table with vapour extraction. Adjustable height to keep your computer scales stable.
Dimensions: 60 x 45 x 125 cm (H x W x D)
Extraction point: Ø 80 mm
Extraction volume: 30 m³/h
Weight: 18 kg



Waste Bin 250 L

000469

This is a waste bin specially designed to go with all Stainless Steel furniture. The front opening extends the table size. Use it with normal 250 L plastic bags. Waste box volume: 250 L. Dimensions: 92 x 46 x 60 cm (H x W x D). Prepared for a connection to a vapor extraction of Ø 80 mm.



7071 Option: Garbagebag 250 L, 25 pieces per roll.

11.2 REINFORCED EQUIPMENT

Hamach has also developed efficient and safe mixing room systems for industrial paint processors using 20 L paint tins.



Industrial Stainless Steel Work Benches

Are you working with larger paint tins? Then, this work bench is the right fit for you!
These reinforced work benches are made from stainless steel and are suitable for paint tins up to 20 L. Sealing the paint tins is also easy on this sturdy work bench. The work bench is available with or without a vapour extraction hood. With two large open shelves, the top one is tilted slightly backwards to keep things in place.









Industrial Scale Table

000481

The Industrial Scale Table features a smooth, brushed stainless steel housing with the space for an industrial weighing scale. It has a reinforced construction for heavier applications. The Industrial Scale Table is recommended for use with tins up to 20 L. Dimensions: 50 x 91 x 60 cm. Height including vapour extraction: 127 cm. Weight: 24 kg.



OVERVIEW OF SOLUTIONS FOR INDUSTRY

Art. no.		Description	Preparation for fume extraction	Width (cm)	Height (cm)	Depth (cm)	
000475		Reinforced Open Stainless Steel Workbench	Yes, with cover	120	91	60	47 kg
000476		Reinforced Open Stainless Steel Workbench	Yes, with cover	180	91	60	72 kg
000477		Reinforced Open Stainless Steel Workbench	No, without cover	120	91	60	35 kg
000480		Reinforced Open Stainless Steel Workbench	No, without cover	180	91	60	55 kg
000481		Reinforced Stainless Steel Computer Scale Platform	Yes, via stainless steel mixing table (20 x 10 cm)	50	91	60	24 kg

When it really has
to be clean

hamach
DUTCH ENGINEERING



**THINKING
OUT OF
THE BOX**

One compact station (automatic or manual) for cleaning your spray guns. Possibility to connect to the Hamach ventilators.



HR 3000 Automatic Spray Gun Washer

000453

Automatic spray gun washer with capacity for two spray guns. Equipped with fluid pumps, cleaning brushes and cleaning nozzle for final rinsing of spray gun with cleaning solvent. During the automatic cleaning process you can clean a spray gun manual on the working platform. The cleaning process stops automatically when you open the lid. Only driven by max. 4 bar compressed air.



HR 2000 Spray Gun Washer

000473

A manual spray gun washer for solvent paint. With vapour extraction connection. All you need is a 5 bar air pressure connection. Simple and effective.



HR 2400 Spray Gun Washer

000474

Pneumatic manual spray gun washing machine. To be connected directly to water supply. With space to carry out the coagulation process and a pneumatic system to accelerate this process. A large tank with a filter system and 4 large wheels to collect all waste, is easy moveable. A security valve limits the excess of water.



Spray Gun Washers

Type	HR 3000	HR 2000	HR 2400
Art. no.	000453	000473	000474
Based	Solvent based	Solvent based	Waterborne
Dimensions (H x W x D)	158 x 84 x 60 cm	158 x 84 x 60 cm	158 x 84 x 60 cm
Working height	105 cm	105 cm	105 cm
Weight	70 kg	65 kg	70 kg
Extraction point ø	ø 180 mm	ø 180 mm	ø 180 mm
Extraction volume	700 m³/h	700 m³/h	400 m³/h
Collecting tank	2 x 25 L	2 x 25 L	60 L
Remark	Automatic Pump	Manual Venturi	Direct connectable to water supply
			Included: 1 Filter bag (coarse) (045601) 1 Filter bag (thin) (045605)
	CE Ex II 2G IIB T4	CE Ex II 2G IIB T4	CE Ex II 3G IIB T4

Thorough and
fast cleaning

hamach
DUTCH ENGINEERING



**THINKING
OUT OF
THE BOX**



hamach
DUTCH ENGINEERING

HR 1400 Spraygun Cleaner 000452

Cleaning your spray gun in between jobs is a time consuming task. The quick and compact Hamach Spraygun Cleaner increases your productivity by enabling you to clean your spray gun from leftover waterborne paint in a matter of seconds! Dimensions: 85 x 30 x 20 cm (H x W x D).



▪ Easy to use

Jet, Flush and Dry.



▪ Increases productivity

Fast and easy colour change.



▪ Environmentally friendly

Limited waste / Limited use of water.



▪ ATEX 2014/34/EU

Can be placed in ATEX zone 2.



▪ Neat and hygienic working

Clean working environment = Excellent results.



CE II 3G IIB T4



hamach
DUTCH ENGINEERING

Cleaning Fluid HR 1000 009819 (10 L)

This is a cleaner, very active and only made with biodegradable products. Suitable for cleaning polyester mastic, two-component polyurethanes, water-based and solvent-based paints, clear coat as well as various kinds of adhesives from spreaders, rules, etc. Environmentally friendly, does not produce vapours. 10 L can.



CE II 3G IIB T4

hamach
DUTCH ENGINEERING

Micro Cleaner HR 1000 000457

Is a wall manual stainless steel washing tank, ideal for the manual cleaning of putty spreaders and small pieces. Equipped with a cleaning brush and automatic circulation of fluid. Suitable to be used with the special Hamach cleaning fluid (009819). All you need is a connection to a compressed air line and fill the special cleaning fluid in the tank of the HR 1000. Ready to use by opening the front flap. The front flap is also the cleaning table and when you close the flap the rest of the cleaning fluid flows back into the tank. The Micro Cleaner HR 1000 can be connected to a vapour extraction line. Equipped with a drain cock to drain the dirty cleaning fluid. Dimensions: 46 x 19 x 53 cm (H x W x D). Tank content: 7 L. Extraction point: Ø 80 mm.

Special waterproof waste containers for paint waste and solvent products. You can place leftover paint and solvents upside down inside this container and close it. Liquids will leak into two different cans underneath. Any hazardous vapours will be extracted from the container through an exhaust duct. It is the perfect solution for paint waste from tins, cups, etc.

There are two different options depending on the sizes of the paint tins, solvent packaging and different lids (automatic or manual). Complies with environmental standards and regulations.



hamach
DUTCH ENGINEERING

**Paint Waste Container Manual
Easy Access**
000471



hamach
DUTCH ENGINEERING

Paint Waste Container Pneumatic
000459



hamach
DUTCH ENGINEERING

Paint Waste Container Small
000482

CE II 3G IIB T4

Paint Waste Containers

Type	Paint Waste Container Manual	Paint Waste Container Pneumatic	Paint Waste Container Small
Art. no.	000471	000459	000482
Based	Manual	Pneumatic	Manual
Dimensions (h x b x d)	124 x 90 x 60 cm	122 x 100 x 60 cm	124 x 45 x 60 cm
Weight	50 kg	50 kg	30 kg
Extraction point ø	ø 80 mm	ø 80 mm	ø 80 mm
Extraction volume	100 m³/h	100 m³/h	100 m³/h
Capacity	max. 2 x 30 L	max. 2 x 30 L	max. 30 L
		Optional: 045901 - 30 L can for Paint Waste Containers	

11.5 VENTILATORS

DUTCH ENGINEERING



Ventilator Units 380 V and 230 V

To make sure that all harmful / dangerous gasses are eliminated, a well equipped mixing room needs a good ventilation system. The Hamach Ventilator Units create a healthy environment for your staff, eliminating health and safety risks.



Ventilator 380 V

ATEX certified. Suitable for zone 1 & 2 ventilation and optional placement within the zoned area. Suitable for use in the mixing room.

Ventilator 230 V

Art. no.	Capacity	V
RVE000001	250 m³/h	380 V
RVE000002	700 m³/h	380 V
RVE000003	1200 m³/h	380 V
RVE000004	1980 m³/h	380 V

Art. no.	Capacity	V
RVL000001	250 m³/h	230 V
RVL000002	700 m³/h	230 V
RVL000003	1200 m³/h	230 V
RVL000004	1980 m³/h	230 V

#Extraction volumes are conservative practice volumes. The final volume depends on the connected piping and the extraction points in combination with sufficient ventilation.

##Speed regulators and control technology available. Ask about the possibilities.

11.6 STICK & GO



Colad

Stick & Go®

676010 (60 cm x 10 m)

676025 (60 cm x 25 m)

6710025 (100 cm x 25 m)

Quick and efficient protection of surfaces like stainless steel table tops. Per roll.

- White for optimum reflection
- Chemical and solvent resistant
- Strong and durable
- Ribbed anti-slip surface
- Easy to apply and cut
- Not anti-static

Colad Stick & Go® is not conductive. To identify if Stick & Go® is suitable to apply in your ATEX working area, the user has the responsibility to identify and assess the risks involved applying the product in his process, following the ATEX user directive 99/92/EG. Please refer to the Technical Datasheet for exact specifications.



Everything for a complete workshop

hamach
DUTCH ENGINEERING



THINKING
OUT OF
THE BOX

hamach
DUTCH ENGINEERING

Sanding Cart 000529

A workstation for storing products or equipment. Suitable for sanding or polishing materials. Supplied with antislip material and drawer lock. Fitted with 4 strong wheels. Per piece. Not assembled.

052911 Standard: Holder for garbage bag.
7071 Option: Trash Bags 250 L



hamach
DUTCH ENGINEERING

Parts Cart 000525

For collecting and storage of dismantled car parts during repair, e.g. bumpers and doors. Large storage space. Mixing cup holders for collecting small parts as screws and lamps. Dimensions: 109 x 76 x 166 cm (H x W x D). Per piece. Not assembled.



hamach
DUTCH ENGINEERING

X-Bok 000840 (with bumper holder)

Sand / Spray Trestle. Universal trestle. Adjustable in different heights and 4-point support for large parts. Max. opening: 124 cm. Storage size: 126 x 60.5 x 9.5 cm. Per piece.



Colad

Trestle 7080

A workshop trestle for placing bumpers and doors on, for either preparation or painting. Sturdy construction and lightweight. Adjustable working height. Equipped with rubber buffers. Can be used on grid floors. Dimensions: 116 x 70 cm. Max. opening: 85 cm. Max. carrying weight 60 kg. Per piece.



hamach
DUTCH ENGINEERING

PS 4 Telescopic Bars 000826

A practical set of work stays to support boot lids, bonnets and doors during preparation. Per set of 3 lengths in a box.



hamach
DUTCH ENGINEERING

Paint Stand HLS 93 000672

A multifunctional Paint Stand for supporting sanding and paint jobs. Suitable for all body parts and bumpers. With 7 accessories. Dimensions: 210 x 140 x 170 cm. Not assembled. Per piece.

Optional for Paint Stand HLS 93:

- 067221 Clamp 10 cm
- 067222 Clamp 20 cm
- 067223 Clamp 30 cm
- 067224 Mirror Holder
- 067225 Wheel Rim Holder
- 067226 Table (Without Clamps)
- 067201 Long rod
- 066657 Short Rod

To reduce the size of paper, plastic or tins Hamach offers a range of professional pneumatic bale presses. Ideal to lower your waste volume easy and fast.

- Compact bales for easier disposal
- Pneumatic so no manpower needed
- Compact and easy to use



hamach
DUTCH ENGINEERING

Bale Press 7000

Pneumatic paper press. Reduces waste volume substantially. Provided with a water separator and safety system that prevents you from opening the pressing room while operating. Ready to use: incl. 2 rolls of cord. Per piece.



hamach
DUTCH ENGINEERING

Combinationpress Buggy 30 000802

Pneumatic press for tins and paper, which reduces waste volume substantially. Suitable for tins up to 30 L and paper. Press cylinder with a compressing force of 650 kg. Per piece, incl. 1 roll of cord.



hamach
DUTCH ENGINEERING

Press Buggy 10 000841

Pneumatic press for tins, which reduces volume up to 85%! Press cylinder with a compressing force of 450 kg. Per piece.

Stand for Buggy 10 000842

Stand for Buggy 10, for an ideal height. Per piece.

Type	Bale Press	Buggy 30	Buggy 10
Art. no.	7000	000802	000841
Press for	Paper	Tins, paper	Tins
Pneumatic	Yes	Yes	Yes
Dimensions (H x W x D)	152 x 75 x 70 cm	185 x 55 x 55 cm	104 x 35 x 33 cm
Pressure	Max. 10 bar (145 PSI)	Max. 10 bar (145 PSI)	Max. 10 bar (145 PSI)
In accordance with	EN 13736 : 2003 + A1 : 2009	EN 13736 : 2003 + A1 : 2009	EN 13736 : 2003 + A1 : 2009
Capacity		30 L	10 L
Optional			art.no. 000842 Stand for Buggy 10 for an ideal height.



hamach
DUTCH ENGINEERING

Working Seat 000528P

Provides a comfortable working position especially when working at difficult angles. Universal seat with gas spring. Large seat area. Adjustable in height. Not assembled. Per piece.



12.4 MISCELLANEOUS



Colad

High-Pressure Air Hose Anti-Static

9113 (Ø 8 x 12 mm - 100 m roll)

9114 (Ø 10 x 15 mm - 60 m roll)

The Colad High-Pressure Air Hose Anti-Static has been developed to be used as a durable solution for power tools. The hose is silicone-free and therefore suitable for spray paint applications. Due to its anti-static properties (resistance $< 10^4 \Omega$), it prevents static discharges and is also suitable to be used in paint processes which generate potentially explosive atmospheres. Per roll.



Service
and quality



Safety



Innovation



Efficiency and
durability


hamach
DUTCH ENGINEERING



- Customized systems
- Maintenance by our in-house Hamach service team
- Solutions for every budget

HCV Central Vacuum for dust extraction is top of the range concerning: Service, Quality, Safety, Efficiency and Innovation. Our qualified Hamach engineers develop dust extraction systems that collect sanding dust at the source (the sanding machine). All of our systems are 100% tailored to your work processes and applicable ATEX regulations. In addition to the health benefits of reduced sanding dust, HCV dust extraction systems keep dust particles from contaminating your fresh coating layers.

Did you know that HCV dust extraction systems are also fitted with highly efficient filter cleaning? The filters always stay "free" of dust, even when working with fillers that leave a sticky sanding residue. This also applies to sanding dust from composites such as carbon fibre, fibreglass and polyester. Want to learn more about efficient, healthy sanding or the separation of aluminium sanding waste? Explore our HCV dust extraction systems with the Hamach app or go to www.hamach.com.

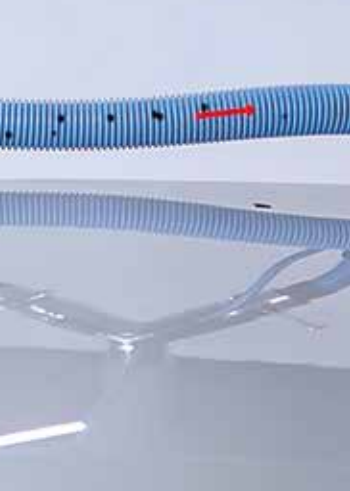


**THINKING
OUT OF
THE BOX**



YOUR HCV SYSTEM

Fill in the Hamach Selection Tool on the Hamach website and you will find out in only a few minutes which Central Vacuum System will match your company needs. All HCV Systems are custom made from high quality material and designed by experienced engineers for each specific customer. Depending on the size of your company, requirements and budget, the Hamach experts build your custom made HCV installation. In short each HCV system consists of 4 specific parts:

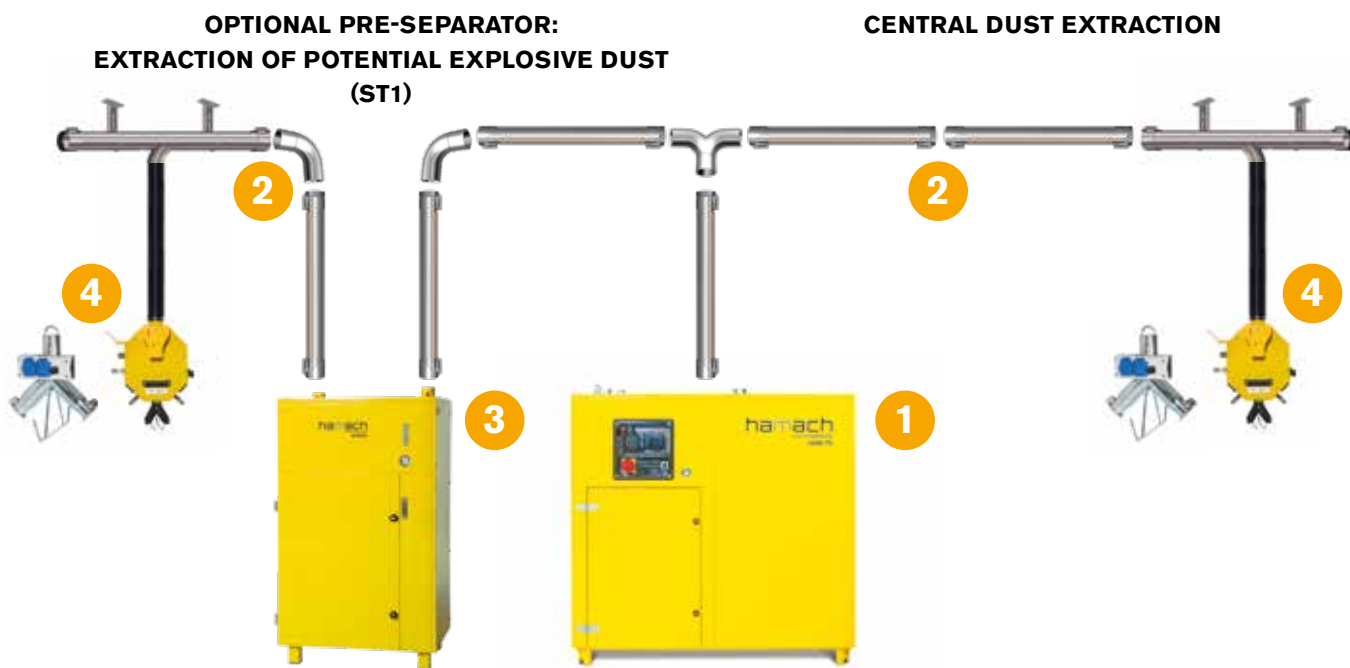

1

Central Vacuum Unit

Each HCV system starts with one of Hamach's central vacuum units. This may vary from a small and portable HCV 410 HQ, suitable for 4 extraction points up to a industrial HCV 18000 TQ suitable for 18 extraction points. Optional is for the TQ 5000, 7000, 9000, 15000 and 18000 a blast cover available.

2

Piping

The chosen Central Vacuum will be equipped with the requested pipework. The steel pipes of each HCV unit are electrically conductive and grounded.

3

Optional Pre-separator

50 TQ EX Pre-separator for separation potentially explosive dust. More information, see page 85. Optional is for this machine a blast cover available.

4

Extraction points

For easy access we equip every work station with the extraction points of your choice.

Customers worldwide choose Hamach as their central vacuum partner, for instance ITAS (UK). ITAS provides bodyshop approval programmes, world-class bodyshop training, ground-breaking software and critical data analysis. Their body and paint programmes create best-in-class repair networks, bringing commercial value and delivering the best possible post-accident experience.

"For dust extraction and in the mixing room, EMM was our first and only choice of supplier. Their customer service is always excellent and the quality of the product is exceptional and complies with the highest technological standards required by the industry. Where safety and standards are concerned there can be no compromise. That is why ITAS is proud to use EMM equipment."



- Bryan Young, Chairman ITAS



PRODUCT RANGES

The core of your HCV system is your Central Vacuum Unit. This unit provides you with the requested dust extraction when needed. Hamach's Central Vacuum Unit's are divided into two specific ranges. Each range matching a different capacity.



	High Quality	Top Quality
Type of company	Small - middle size bodyshops	Middle - large bodyshops
Type of use	Variety of use, up to 8 hours a day	Continuous professional use 24/7
Amount of work stations	1 - 6	1 - 18

LET'S TAKE A LOOK INSIDE

Now that you have seen the complete system, let's meet the inside of your Central Vacuum Unit.

Switchbox

Enables you to use energy as efficient as possible. The switchbox controls the central vacuum units main functions like:

- start/stop
- automatic filter cleaning
- running time after turning off.

Additional:

- pressure regulator
- automatic start for electric sanders
- remote control.

*For the units HCV 410 HQ and HCV 510 HQ the switch box is an additional option.

Filters

The smart filter system of HCV makes sure that you are always working in the best possible circumstances. The automatic filter cleaning system prevents loss of underpressure.



Air entrance

Fresh air enters the engine.

Blast Cover

Optional: ATEX blast cover provides an outlet for explosion in case of a limited explosive destruction.



Waste Bin

The HCV waste bin fits perfectly to keep the inside of your unit clean and dust-free.



Base

Makes sure that the unit is stable and prevents shaking and strumming.

Engine

The powerful engines of HCV have proven to have a lifetime of over 20 years.

Housing

The solid yellow HCV housing is supplied with vent holes to prevent over-heating of the unit.



“ Over 30 years of worldwide experience, tailor made systems maintained by our HCV team and a solution for every budget!

”



- Safe and soundless in use
- Proven high quality and durability
- Powerful and constant dust extraction of fine and coarse dust
- High performance dust filters
- Installation and maintenance by our service teams
- High efficiency
- Savings in the use of abrasives



SERVICE AND QUALITY

- Over 30 years of experience worldwide (more than 13 million working hours)
- Installation on the spot
- Experience in both industrial customer (24/7) and smaller customers
- Service and maintenance by our experienced HCV team
- Warranty included, possibility to expand with specific warranty packages



SAFETY

CE SAFETY REGULATIONS

All our HCV units and parts comply with the European Economic Area regulations. This is our declaration that our products meet the requirements of the applicable EC directives.



ATEX

All HCV TQ systems are optionally available as ATEX zone 22 units and match the requirements in directive 2014/34/EU: "European directive for equipment & protective systems intended for use in potentially explosive atmospheres". These units are also suitable to extract potentially explosive dust (St1).



EFFICIENCY AND DURABILITY

- Built in filter cleaning system provides continuous power and suction
- Saving of abrasives (up to 20%)



INNOVATION



Programmable control system

This system keeps track of the HCV working hours. This major energy saver automatically shuts down on weekends or when you leave the company at closing time.



Frequency regulator

Possibility of saving up to 70% on energy or upgrade the power by 25%.

UP TO 10 YEARS WARRANTY ON HAMACH HCV!

Over the last thirty years, Hamach has designed and installed many high quality Hamach Central Vacuum (HCV) dust extraction systems for the automotive, shipbuilding and industrial section. HCV Central Vacuum for dust extraction is top of the range concerning: Service, Quality, Efficiency and Innovation. Our qualified Hamach engineers develop dust extraction systems that collect sanding dust at the source.

Service and repair for Hamach HCV Central Dust Extraction Systems

The Hamach Central Dust Extraction Systems TQ and HQ require annual maintenance based on a maintenance

10 YEARS**WARRANTY**

interval recommended by Hamach's maintenance department. Hamach offers a standard manufacturer's warranty for the HCV TQ and HQ series, as well as an excellent extended warranty.

96 months for the HCV TQ series, with a maximum warranty period of 10 years*

24 months for the HCV HQ series, with a maximum warranty period of 3 years*

*Ask us for the Hamach Service Contract conditions. When you choose Hamach, you choose a reliable and durable solution!



FIND YOUR PERFECT DUST EXTRACTOR WITH OUR HCV SELECTION TOOL

Hamach has class leading dust extraction solutions for industrial work processes: HCV, Hamach Central Vacuum Systems. All HCV Systems are custom made from high quality material and designed by experienced engineers for each specific customer. Depending on the size of your company, requirements and budget, the Hamach experts build your custom made HCV installation.

Design your own HCV Central Dust Extraction System with the **Hamach Selection Tool.**



Fill in the HCV Selection Tool at **www.hamach.com**, and you will find out in only a few minutes which Central Vacuum System will match your needs



hamach
DUTCH ENGINEERING

HCV 5000 TQ

000586

- Central Vacuum TQ with a 4 kW/380-400 V motor
- Sufficient for max. 5 sanding workers and tube work of ± 70 m
- Ideal for working areas in adjacent rooms
- Standard 24 months warranty. Take a Hamach Service Contract and the warranty period* will be extended till a maximum of 120 months!
- Filter capacity: > 99.9%. M-class.



hamach
DUTCH ENGINEERING

HCV 7000 TQ

000565

- Central Vacuum TQ with 2 x 3 kW/380-400 V motor
- Sufficient for max. 7 sanding workers and tube work of ± 110 m
- Ideal for a working area with variable number of workers (3 - 7) during the day
- With the 2 motor on/off switch, depending on the number of workers connected, one only uses the energy needed, saving money every day!
- Standard 24 months warranty. Take a Hamach Service Contract and the warranty period* will be extended till a maximum of 120 months!
- Filter capacity: > 99.9%. M-class.



hamach
DUTCH ENGINEERING

HCV 9000 TQ

000584

- Central Vacuum TQ with a 7.5 kW/380-400 V motor
- Sufficient for max. 9 sanding workers and tube work of ± 120 m
- Standard 24 months warranty. Take a Hamach Service Contract and the warranty period* will be extended till a maximum of 120 months!
- Filter capacity: > 99.9%. M-class.

Technical data	5000 TQ	7000 TQ	9000 TQ
Max. extraction points	5	7	9
Volt (V)	380 - 400 (50 Hz)	380 - 400 (50 Hz)	380 - 400 (50 Hz)
Power (kW)	4,0	6,0 (2 x 3,0)	7,5
Air flow (m ³ /h)	430	620	710
Air flow (L/min)	7.150	10.300	11.800
Under pressure (kPa)	26	26	26
Under pressure (m.bar)	260	260	260
Number of motors	1	2	1
Air pressure (bar)	5	5	5
Weight (kg)	270	325	400
Dimensions (L x W x H cm)	135 x 60 x 150	135 x 60 x 150	135 x 60 x 150
Noise level (dBa)	70	72	73
Polyester non woven filters (m ²)	6 x 0,8	6 x 0,8	6 x 0,8
Filter surface (m ²)	4,8	4,8	4,8
Automatic filter cleaning	Yes	Yes	Yes
Container volume (L)	50	50	50
Tube work (m)	± 70	± 110	± 120
Switch box (24 V)	Standard	Standard	Standard
Inverter available	Optional	Optional	Optional
Formulated according to ATEX standards	Optional	Optional	Optional



hamach
DUTCH ENGINEERING

HCV 15000 TQ

000588

- Central Vacuum TQ with a 12.5 kW/380-400 V motor
- Sufficient for max. 15 sanding workers and tube work of max. ± 200 m
- Standard 24 months warranty. Take a Hamach Service Contract and the warranty period* will be extended till a maximum of 120 months!
- Filter capacity: > 99.9%. M-class.



hamach
DUTCH ENGINEERING

HCV 18000 TQ

000589

- Central Vacuum TQ with a 12.5 kW/380-400 V motor
- Sufficient for max. 18 sanding workers and tube work max. ± 250 m
- Standard 24 months warranty. Take a Hamach Service Contract and the warranty period* will be extended till a maximum of 120 months!
- Filter capacity: > 99.9%. M-class.



Top Quality dust extraction turbines for duct piping of max. 250 m. Suitable for 24 hour operating in industry or large companies. Standard with 24 months warranty, can be extended with maintenance contract to max. 120 months.

- For continuous industrial use (24 hours a day)
- Can be installed in combination with swing arms, energy boxes or simple connections
- Frequency regulator optional

Warranty up till 10 years!

*Ask us for the Hamach Service Contract conditions. Choose Hamach and you choose a reliable and durable solution!

Technical data	15000 TQ	18000 TQ
Max. extraction points	15	18
Volt (V)	380 - 400 (50 Hz)	380 - 400 (50 Hz)
Power (kW)	12,5	12,5
Air flow (m ³ /h)	1100	1400
Air flow (L/min)	18.300	23.300
Under pressure (kPa)	26	26
Under pressure (m.bar)	260	260
Number of motors	1	1
Air pressure (bar)	5	5
Weight (kg)	600	625
Dimensions (L x W x H cm)	188 x 95 x 190	188 x 95 x 190
Noise level (dBa)	74	74
Polyester non woven filters (m ²)	9 x 0,8	9 x 0,8
Filter surface (m ²)	7,2	7,2
Automatic filter cleaning	Yes	Yes
Container volume (L)	150	150
Tube work (m)	± 200	± 250
Switch box (24 V)	Standard	Standard
Inverter available	Optional	Optional
Formulated according to ATEX standards	Optional	Optional



Work safe and
healthy

hamach
DUTCH ENGINEERING



THINKING
OUT OF
THE BOX




HCV 50 TQ EX Aluminum Pre-separator 000585

Pre-separator with automatic filter cleaning to separate and collect explosive dust. To be installed between the HCV cyclone extraction unit and work areas where explosive dust is extracted. Designed to meet ATEX guidelines for extracting explosive dust (classification ST1). The unit can also be installed in Zone 22-classified areas. Optional: Blast cover.



Directive 2014/34/EU: "European directive for equipment & protective systems intended for use in potentially explosive atmospheres".



Optional




Technical data	Standard	Optional
Max. number of workspaces	4 - 5	8 - 10
Operating pressure (bar)	4	4
Filters (anti-static, m ²)	3 x 0,8	6 x 0,8
Filter surface area (m ²)	2,4	4,8
Dust container capacity (L)	50	50
Dimensions (L x W x H cm)	90 x 60 x 150	90 x 60 x 150
Automatic filter cleaning	Yes	Yes
Blast cover	Optional (preparation available)	Yes
Weight	160 kg	160 kg



“ All TQ models can be optionally delivered as ATEX versions, making them suitable for the extraction of potentially light explosive dust (ST1 dust) ”

Professional equipment
for industry and bodyshops

hamach
DUTCH ENGINEERING

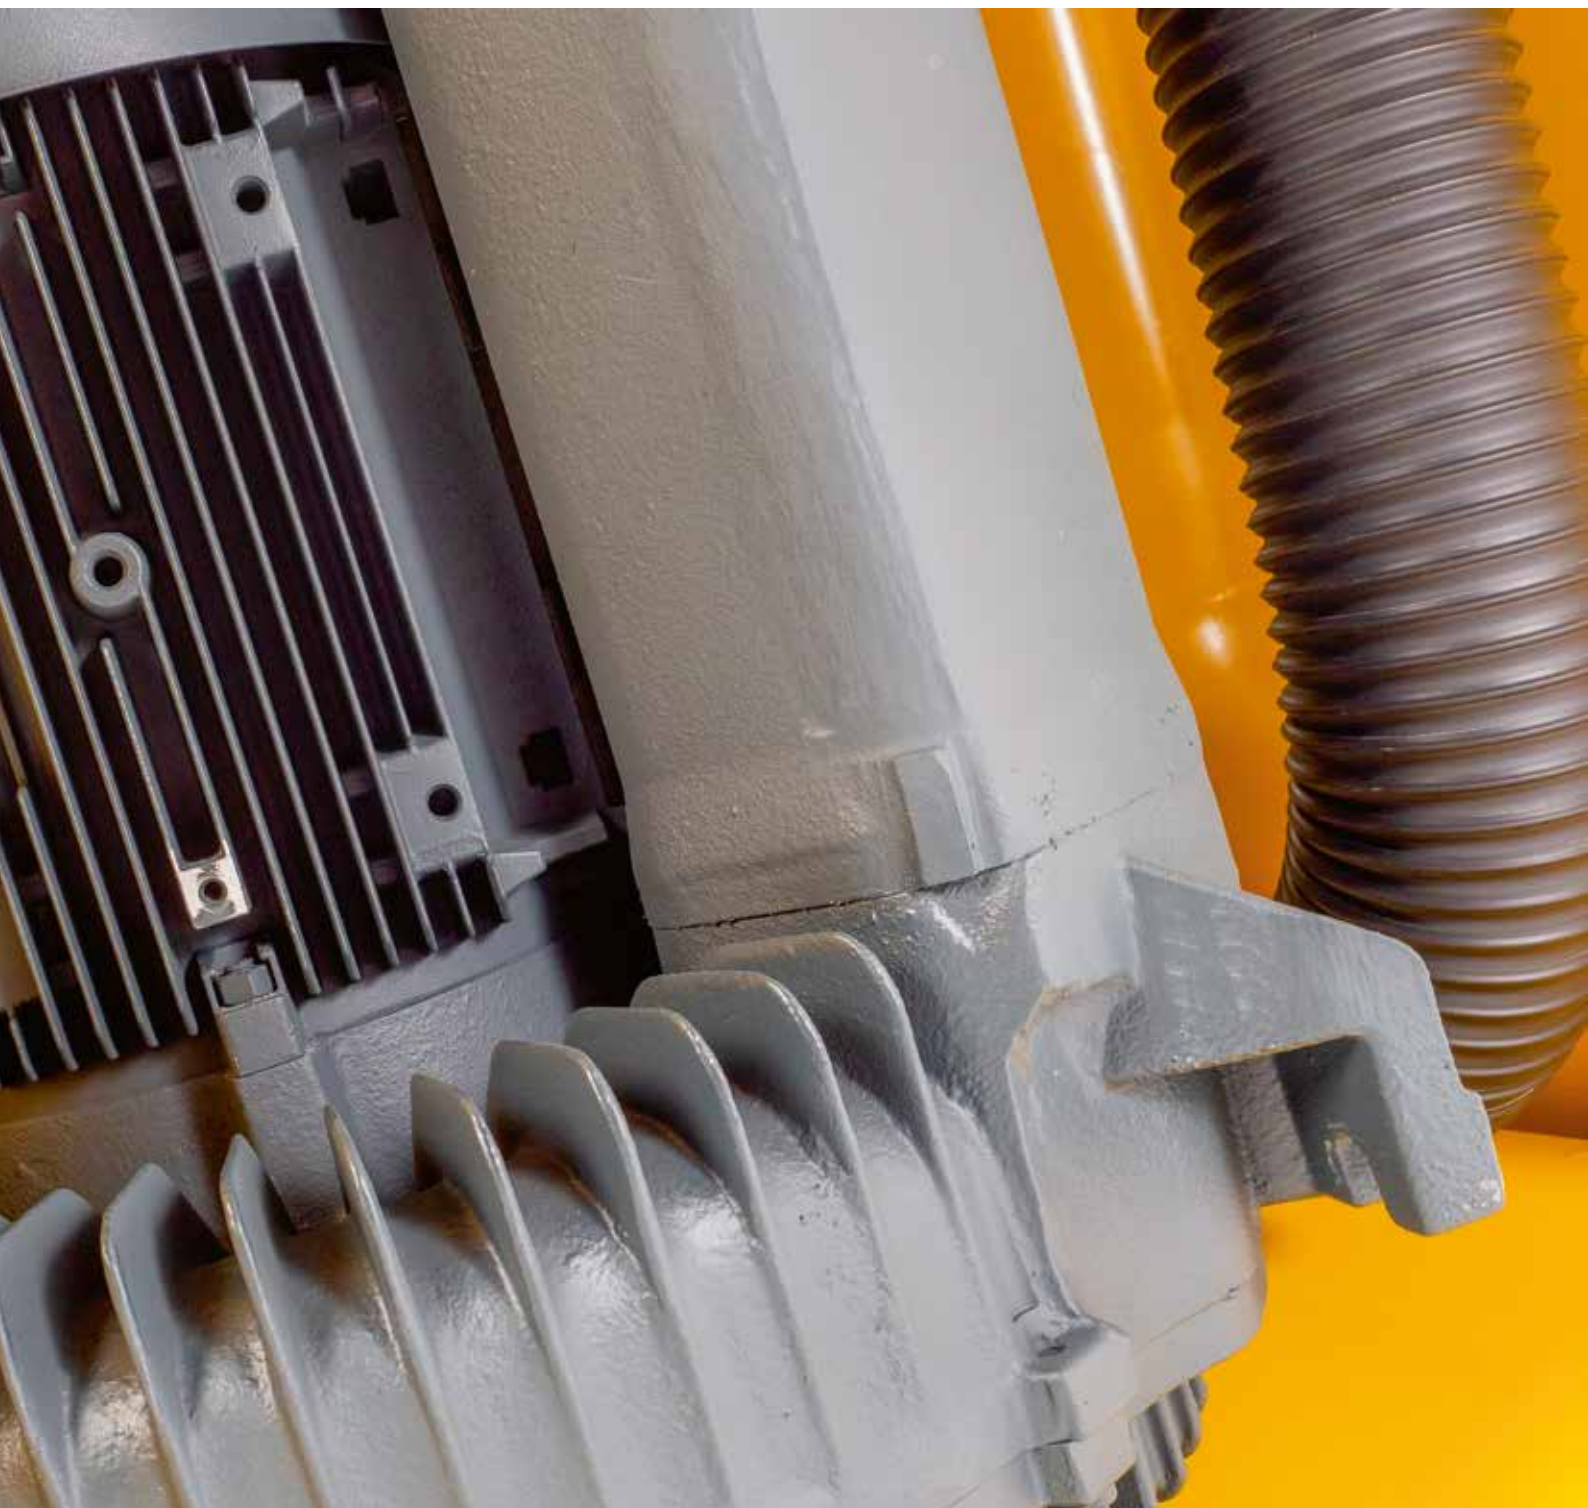

THINKING
OUT OF
THE BOX

High Quality extraction turbine for duct piping of max. 70 m.
Suitable for normal, professional use in medium and small companies.

hamach
DUTCH ENGINEERING

Central Vacuum HCV 410 HQ
000561

- Central Vacuum HQ with a 4 kW/400 V motor
- Sufficient for max. 4 sanding workers and a pipeline of \pm 20-30 m
- Ideal for multiple working areas in one hall
- Can be installed in combination with swing arms, energy boxes or simple connections
- With manual filter cleaning
- Filter capacity: > 99.1%. L-class.
- Standard 12 months warranty. Take a Hamach Service Contract and the warranty period* will be extended till a maximum of 36 months!

hamach
DUTCH ENGINEERING

Central Vacuum HCV 510 HQ
000562

- Central Vacuum HQ with a 5.5 kW/400 V motor
- Sufficient for max. 5 sanding workers and a pipeline of \pm 30-70 m
- Ideal for multiple working areas in one hall
- Can be installed in combination with swing arms, energy boxes or simple connections
- With manual filter cleaning
- Filter capacity: > 99.1%. L-class.
- Standard 12 months warranty. Take a Hamach Service Contract and the warranty period* will be extended till a maximum of 36 months!

hamach
DUTCH ENGINEERING

Central Vacuum HCV 410 HQ A
000566

- Same capacity as the HCV 410 but with automatic filter cleaning
- Filter capacity: > 99.9%. M-class.
- Standard 12 months warranty. Take a Hamach Service Contract and the warranty period* will be extended till a maximum of 36 months!

hamach
DUTCH ENGINEERING

Central Vacuum HCV 610 HQ
000563

- Central Vacuum HQ with a 5.5 kW/400 V motor
- Sufficient for max. 6 sanding workers and a pipeline of \pm 30-70 m
- Ideal for working areas in adjacent rooms
- Can be installed in combination with swing arms, energy boxes or simple connections
- With automatic filter cleaning
- Filter capacity: > 99.9%. M-class.
- Standard 12 months warranty. Take a Hamach Service Contract and the warranty period* will be extended till a maximum of 36 months!



Warranty up till 3 years!*

*Ask us for the Hamach Service Contract conditions. Choose Hamach and you choose a reliable and durable solution

Technical data	410 HQ	410 HQ A	510 HQ	610 HQ
Max. extraction points	4	4	5	6
Volt (V)	400 (50 Hz)	400 (50 Hz)	400 (50 Hz)	400 (50 Hz)
Power (kW / HP)	4 / 5,5	4 / 5,5	5,5 / 7,5	5,5 / 7,5
Air flow (m³/h)	300	300	550	550
Air flow (L/min)	5000	5000	9166	9166
Under pressure (kPa)	20	20	24	24
Under pressure (m.bar)	200	200	240	240
Number of motors	1	1	1	1
Air pressure (bar)	-	5	-	5
Weight (kg)	100	100	160	180
Dimensions (L x W x H cm)	112 x 62 x 96	112 x 62 x 96	138 x 68 x 110	138 x 68 x 110
Noise level (dBa)	70	70	80	80
Filters	Molton and nylon	Polyester	Molton and nylon	Polyester
Filter surface (m²)	0,5	1	0,5	2,8
Automatic filter cleaning	No	Yes	No	Yes
Container volume (L)	35	35	70	70
Tube work (m)	\pm 20-30	\pm 20-30	\pm 30-70	\pm 30-70
Switch box (24 V)	Optional	Standard	Optional	Standard

Ideal for a big scope in a flexible workspace. If necessary, combine with one of Hamach's Energy Boxes.

- Equipped with an unique balanced gear transmission
- These swing arms gives you a range of 8 - 12 m in your working area and all connections for energy and dust extraction in direct operating reach

hamach
DUTCH ENGINEERING

Swing Arm HSA 625 C

000556

- A length of 6 m. to be combined with one of Hamach's Energy Boxes



hamach
DUTCH ENGINEERING

Swing Arm HSA 625

000555

- Manual on/off switch for compressed air or electric sanding tools
- 6 m. length incl. 3 compressed air connections (regulable), 2 electric sockets 230 V, 1 double dust extraction connection and a lamp



hamach
DUTCH ENGINEERING

Swing Arm HSA 625 P

000557

- The same as Swing Arm HSA 625 but with Pneumatic Automatic switch (autostart)



WWW.COLAD.COM



Colad



Colad_com






Energy Box

Add an Energy Box to your HCV installation and you have maximum working flexibility in daily operations.

All functions combined in one unique central Hamach HCV device! Control the HCV machine, operate sanding machines/spray guns/air flow pistol/insert other machines in the electric connection and/or hang machines and hoses. The Hamach Energy Box is one central spot for compressed air, vacuum and electricity!

Energy Box features

- dust extraction connection for 2 sanding machines, in one double switch
- electric power connection
- compressed air connection with safety coupling
- hose bracket
- bracket for hanging sanding machines
- on/off switch for the HCV motor
- prepared for several mounting options
- handle.

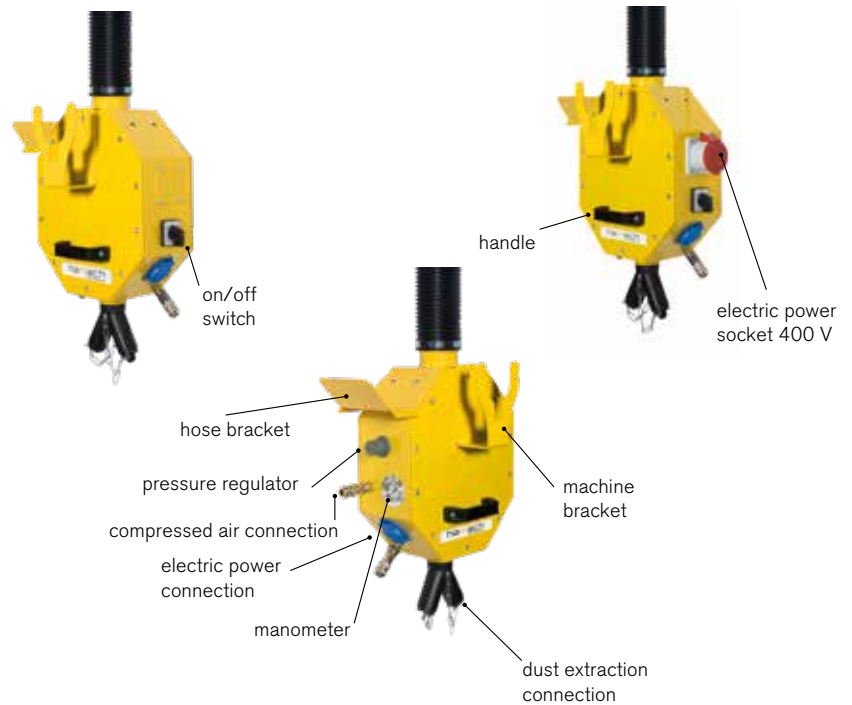

	EB Basic		EB Matic	
	<ul style="list-style-type: none"> ▪ 2 electric power sockets ▪ 3 compressed air sockets (6 bar) ▪ 1 hose bracket ▪ 1 machine bracket ▪ 1 handle 		<ul style="list-style-type: none"> ▪ automatic start/stop pneumatic ▪ 2 electric power sockets ▪ 3 compressed air sockets (6 bar) ▪ 1 hose bracket ▪ 1 machine bracket ▪ 1 handle 	
Art. no.	000577	000576	000578	000575
Volt (V)	230	400	230	400
Optional				
Wall mount	000577W	000576W	000578W	000575W
Swing arm mount	000577Z	000576Z	000578W	000575Z



**THINKING
OUT OF
THE BOX**

The best filters
for the strongest system

hamach
DUTCH ENGINEERING



THINKING
OUT OF
THE BOX



hamach
DUTCH ENGINEERING

Single Point

B04101 - Single connection Wall
B04102 - Single connection Ceiling
B04107 - Single connection with
on/off switch



hamach
DUTCH ENGINEERING

Single Point

B04905



hamach
DUTCH ENGINEERING

Double Point

B04201 (standard valve)
B04211 (switch)
B04210 (sliding valve -
manual)
Double connection Ceiling/
Wall



hamach
DUTCH ENGINEERING

Double Point with Electricity and Switch

B04314
B04302
Double connection ceiling
+ double power socket
+ air + tool holder + switch on/off.

Reliable, efficient and durable

Optimum dust extraction asks for top range filters. All HCV systems contain these filters when delivered and installed. To maintain proper extraction we offer a wide variety of filters suitable for all HCV stations.



hamach
DUTCH ENGINEERING

Filter HCV 410 HQ

056134

Complete Filterset.
Filter capacity:
>99.1% L-class



hamach
DUTCH ENGINEERING

Filter HCV 410 A

059404

Filter capacity:
>99.9% M-class



hamach
DUTCH ENGINEERING

Filter set HCV 410 A

056601

Filter capacity:
>99.9% M-class



hamach
DUTCH ENGINEERING

Filter HCV 510 HQ

056267

Complete Filterset.
Filter capacity:
>99.1% L-class



hamach
DUTCH ENGINEERING

Polyester Filter HCV 610 HQ

059401

Filter capacity:
>99.9% M-class



hamach
DUTCH ENGINEERING

Polyester Filter EQ/TQ Turbine

059402

Filter capacity:
>99.9% M-class



hamach
DUTCH ENGINEERING

Polyester Anti Static Filter EQ/ TQ Turbine EX

059403

Filter capacity:
>99.9% M-class



Disclaimer EMM International BV

EMM International BV has created the information with the utmost care. Nevertheless, EMM International BV cannot be held responsible for the correctness or completeness of the information provided by us or third parties. The provided information in this catalogue can be adjusted without further notification. No rights can be derived from the information in the catalogue. EMM International BV cannot be held responsible for direct or indirect damages caused by the (not) mentioned information in this catalogue. Subject to change and no liability for printing errors.