

NON-SLIP SURFACE PROTECTION FILM


TECHNICAL DATA SHEET **2214**

V4 [02/25]

PRODUCT DESCRIPTION

Non-Slip Surface Protection Film is designed to protect any kind of surface from light mechanical damage and paint contamination. The product is constructed of a white, high opacity semi-translucent polyolefin carrier containing an anti-slip agent, and has an acrylic adhesive-coating on the underside.

PRODUCT CONSTRUCTION

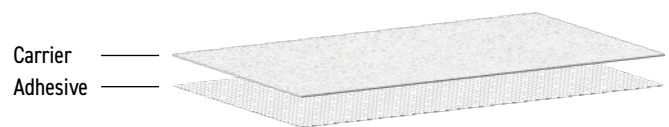

SHELF LIFE

6 months from date of receipt by customer when stored at 20°C ±10°C (68°F ±18°F) and 50% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Carrier	Polyolefin Film
Carrier Surface	Surface Impregnated with anti-slip additive
Adhesive	Acrylic-based
Colour	White (high opacity, semi-translucent)
Thickness	120µm / 0.120mm (±10%)
Width	600mm or 1200mm (±5%).
Length	25m or 50m (±10%). Other lengths available on request.

PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Peel Adhesion	6.3N/25mm
Application Temperature	5°C to 45°C (41°F to 113°F)
Removal Temperature	>5°C (>41°F)
Service Life	Up to 6 months; the product should be removed no later than 6 months after application

Tel: +44 (0)1625 618185 | www.jtape.com | info@jtape.com

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.